

SONY

SMO-F561 series

***Magneto-Optical
Disk Drive***

Version 1.0

SCSI Specifications

DISCLAIMER

Copyright © 2000 SONY Corporation. All Rights Reserved.

No part of this publication may be reproduced or transmitted in any form or by any means - graphic, electronic, electrical mechanical or chemical, including photocopying, recording in any medium, taping, by any computer, or information storage and retrieval systems etc., without prior permission in writing from Sony.

While every effort has been made to ensure the accuracy of all information in this document, Sony assumes no liability to any party for any loss or damage caused by errors or omissions or by statements of any kind in the Sony SCSI specification, its updates, or special editions, whether such errors are omissions or statements resulting from negligence, accident or any other cause. Sony further assumes no liability arising out of the or any use application or use of any product or system described herein; nor any liability for incidental or consequential damages arising from the use of this document. Sony disclaims all warranties regarding the information contained herein, whether expressed, implied or statutory, including implied warranties of merchantability or fitness for a particular purpose.

Sony makes no representation that the interconnection of products in the manner described herein will not infringe on existing or future patent rights, nor do the descriptions contained herein imply the granting of license to make, use, or sell equipment constructed in accordance with this description.

Sony reserves the right to make changes without further notice to any products herein to improve reliability, function, or design.

REFERENCES

- SMO-F561 series Technical Guide and Specifications
- Small Computer System Interface (SCSI-2), ANSI X3.131-1994
- ISO/IEC xxxxx-xxxx : Information Technology - 130 mm Optical Disk Cartridges - Capacity: 9,1 Gbyte per Cartridge - For Information Interchange
- ISO/IEC 15286-1999 : Information Technology - 130 mm Optical Disk Cartridges - Capacity: 5,2 Gbyte per Cartridge - For Information Interchange
- ISO/IEC 14517-1997 : Information Technology - 130 mm Optical Disk Cartridges - Capacity: 2,6 Gbyte per Cartridge - For Information Interchange
- ISO/IEC 13549-1994 : Data Interchange on 130 mm Optical Disk Cartridges - Capacity: 1,3 Gbyte per cartridge -
- ISO/IEC 10089-1991 : Information Technology -130 mm rewritable Optical Disk Cartridges for information Interchange
- ISO/IEC 11560-1992 : 130 mm Write Once Optical Disk Cartridges for Information Interchange - Capacity 650 Mega-bytes per Cartridge -

Printing History

| | |
|-------------------|-------------------------|
| May 25, 2000 | Preliminary Version 1.0 |
| November 29, 2000 | Version 1.0 |

CONTENTS

SCSI Specification

| | | |
|-----------|--|-----|
| SECTION 1 | INTRODUCTION | 5 |
| SECTION 2 | SCSI SPECIFICATION | 6 |
| 2.1 | PHASES | 6 |
| 2.1.1 | ARBITRATION phase | 6 |
| 2.1.2 | SELECTION phase | 6 |
| 2.1.3 | RESELECTION phase | 6 |
| 2.1.4 | INFORMATION TRANSFER phase | 6 |
| 2.1.5 | DATA phase | 7 |
| 2.1.6 | COMMAND phase | 7 |
| 2.1.7 | MESSAGE phase | 7 |
| 2.1.8 | STATUS phase | 16 |
| 2.2 | SCSI BUS CONDITIONS | 18 |
| 2.2.1 | ATTENTION condition | 18 |
| 2.2.2 | RESET condition | 19 |
| 2.2.3 | UNIT ATTENTION condition | 19 |
| 2.3 | DISK FORMAT | 20 |
| SECTION 3 | COMMANDS | 26 |
| 3.1 | INTRODUCTION | 26 |
| 3.2 | COMMANDS under SCSI-2 Operating Definition | 28 |
| | TEST UNIT READY 00H | 31 |
| | REZERO UNIT 01H | 32 |
| | REQUEST SENSE 03H | 33 |
| | FORMAT UNIT 04H | 44 |
| | REASSIGN BLOCKS 07H | 49 |
| | READ(6) 08H | 52 |
| | WRITE(6) 0AH | 53 |
| | SEEK(6) 0BH | 55 |
| | INQUIRY 12H | 56 |
| | MODE SELECT(6) 15H | 59 |
| | RESERVE 16H | 79 |
| | RELEASE 17H | 80 |
| | MODE SENSE(6) 1AH | 81 |
| | START/STOP UNIT 1BH | 100 |
| | RECEIVE DIAGNOSTIC RESULTS 1CH | 101 |
| | SEND DIAGNOSTIC 1DH | 103 |
| | PREVENT/ALLOW MEDIUM REMOVAL 1EH | 106 |
| | READ CAPACITY 25H | 107 |
| | READ(10) 28H | 109 |
| | WRITE(10) 2AH | 111 |
| | SEEK(10) 2BH | 113 |
| | ERASE(10) 2CH | 114 |
| | WRITE AND VERIFY(10) 2EH | 116 |
| | VERIFY(10) 2FH | 118 |
| | PRE-FETCH 34H | 120 |
| | SYNCHRONIZE CACHE 35H | 121 |
| | READ DEFECT DATA(10) 37H | 122 |
| | MEDIUM SCAN 38H | 124 |
| | WRITE BUFFER 3BH | 127 |
| | READ BUFFER 3CH | 130 |
| | READ LONG 3EH | 133 |
| | WRITE LONG 3FH | 135 |
| | CHANGE DEFINITION 40H | 137 |

| | |
|---------------------------------|-----|
| LOG SELECT 4CH | 139 |
| LOG SENSE 4DH | 141 |
| MODE SELECT(10) 55H | 146 |
| MODE SENSE(10) 5AH | 149 |
| READ(12) A8H | 152 |
| WRITE(12) AAH | 154 |
| ERASE(12) ACH | 156 |
| WRITE AND VERIFY(12) AEH | 158 |
| VERIFY(12) AFH | 160 |
| READ DEFECT DATA(12) B7H | 162 |
| READ LONG* DEH | 165 |
| WRITE LONG* DFH | 166 |
| Appendix A: Internal Error Code | 168 |
| Appendix B: ODC Error Code | 172 |
| Appendix C: DSP Error Code | 174 |

SECTION 1 INTRODUCTION

This document describes how the Sony SMO-F561 Magneto-Optical (MO) Disk Drive implements the SCSI specifications, defined by the American National Standard for Information Systems in the following documents:

- ANSI X3.131-1994 : Information Systems - Small Computer Systems Interface-2 (SCSI-2)
- ANSI X3T9.2-85-82 revision 4B : Common Command Set (CCS) of the Small Computer System Interface
- ANSI X3.131-1986 : Small Computer Systems Interface (SCSI)

For materials not described in this documents, refer to the following:

- SMO-F561 series Technical Guide and Specifications
- ISO/IEC xxxxx-xxxx : Information Technology - 130 mm Optical Disk Cartridges - Capacity 9,1 Gbyte per cartridge - For Information Interchange
- ISO/IEC 15286-1999 : Information Technology - 130 mm Optical Disk Cartridges - Capacity 5,2 Gbyte per cartridge - For Information Interchange
- ISO/IEC 14517-1997 : Information Technology - 130 mm Optical Disk Cartridges - Capacity 2,6 Gbyte per cartridge - For Information Interchange
- ISO/IEC 13549-1994 : Data Interchange on 130 mm Optical Disk Cartridges - Capacity: 1,3 Gbyte per cartridge-
- ISO/IEC 10089-1991 Format A : 130 mm Rewritable Optical Disk Cartridges for Information Interchange
- ISO/IEC 11560-1992 : 130 mm Write Once Disk Cartridges for Information Interchange - Capacity 650Mega-bytes per Cartridge -

SECTION 2 describes all the SCSI specifications with the exception of the command descriptions of the drive. SECTION 3 describes the command specifications.

For 1.3 Gbytes and 650 Mbyte media, the drive can only READ the data and cannot write any data.

SECTION 2 SCSI SPECIFICATION

This section gives brief descriptions on operations of the SCSI controller firmware.

2.1 PHASES

The drive supports all the phases specified in SCSI-2 standard (ANSI X3.131-1994). The following paragraphs describe each phase:

2.1.1 ARBITRATION phase

When the drive tries to reconnect to an initiator for the purpose of continuing command operation, it waits for the BUS FREE phase to occur, and then enters the ARBITRATION phase.

2.1.2 SELECTION phase

The drive detects if it is selected during this phase. The drive considers to be selected if the SEL and its SCSI ID bit are asserted and BSY and I/O are negated at least during the bus settle delay period.

2.1.3 RESELECTION phase

When the drive tries to reconnect to an initiator for continuing the command operation, it reselects the initiator after winning the arbitration. If the initiator does not respond to RESELECTION within the Selection Time-Out Delay (250 ms), the drive releases the SCSI BUS. And after releasing the SCSI BUS for a short period of time (about 100 μ s), the drive retries RESELECTION after winning the arbitration. If the initiator cannot respond to the fifth retry of RESELECTION, the drive terminates the current I/O process. No pending data, status nor ending message will be sent for the operation.

2.1.4 INFORMATION TRANSFER phase

When the information is transferred from an initiator to the drive, the drive performs a parity check if the SCSI Parity Checking function is enabled. When the information is transferred from the drive to an initiator, parity is always generated by the drive. Refer to the appropriate drive technical guide for detailed information about SCSI Parity Checking function.

2.1.5 DATA phase

Data is transferred from the drive to the host during the DATA IN phase. On the other hand, data is transferred from the host to the drive during the DATA OUT phase.

If the parity error detection is enabled by the Functional Switch, the drive checks the parity during the DATA OUT phase. When a parity error is detected, the drive returns the CHECK CONDITION status to the initiator and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 0BH/47H/00H (ABORTED COMMAND/SCSI Parity Error).

When INITIATOR DETECTED ERROR message is sent from an initiator for the data transfer from the drive to the initiator, the drive returns CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 0BH/48H/00H (ABORTED COMMAND/Initiator Detected Error Message Received).

2.1.6 COMMAND phase

COMMAND phase is a state that Command Descriptor Block (CDB) is sent from the initiator to the drive. CDB notifies the drive which operation is ordered by the initiator.

If the parity error detection is enabled, the drive checks the parity during the COMMAND phase. When a parity error is detected, the drive returns a CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 0BH/47H/00H (ABORTED COMMAND/SCSI Parity Error).

See SECTION 3 for detailed descriptions of the commands supported by the drive.

2.1.7 MESSAGE phase

Message is sent from the drive to the host during the MESSAGE IN phase. On the other hand, message is sent from the host to the drive during the MESSAGE OUT phase.

If the parity error detection is enabled, the drive checks the parity during the MESSAGE OUT phase. When a parity error is detected, the drive retries the MESSAGE OUT phase according to the following sequence:

1. Continues the REQ/ACK handshakes until the initiator negates an ATN signal. (all message bytes are received).
2. Notifies the initiator to re-send all of the previous message byte(s) within the current phase while asserting REQ signals.

If the message is not received correctly, the drive terminates the present command with a CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 0BH/43H/00H (ABORT COMMAND /Message Error).

PHASES

The drive supports following messages:

| Code | Direction | Description |
|---------------------|-----------|--------------------------------------|
| 00H | IN | COMMAND COMPLETE |
| 01H 03H 01H XXH XXH | IN/OUT | SYNCHROMOUS DATA TRANSFER REQUEST |
| 02H | IN | SAVE DATA POINTER |
| 03H | IN | RESTORE POINTERS |
| 04H | IN | DISCONNECT |
| 05H | OUT | INITIATOR DETECTED ERROR |
| 06H | OUT | ABORT |
| 07H | IN/OUT | MESSAGE REJECT |
| 08H | OUT | NO OPERATION |
| 09H | OUT | MESSAGE PARITY ERROR |
| 0AH | IN | LINKED COMMAND COMPLETE |
| 0BH | IN | LINKED COMMAND COMPLETE (WITH FLAG) |
| 0CH | OUT | BUS DEVICE RESET |
| 0DH | OUT | ABORT TAG |
| 0EH | OUT | CLEAR QUEUE |
| 20H XXH | IN/OUT | SIMPLE QUEUE TAG |
| 21H XXH | OUT | HEAD OF QUEUE TAG |
| 22H XXH | OUT | ORDERED QUEUE TAG |
| 80H-FFH | IN/OUT | IDENTIFY |

(IN: drive to initiator OUT: Initiator to drive)

COMMAND COMPLETE 00H

This message is sent from the drive to the initiator to indicate that a command has been executed and that a valid status has been sent to the initiator. After successfully sending this message, the drive goes to the BUS FREE phase by releasing BSY.

SYNCHRONOUS DATA TRANSFER REQUEST 01H 03H 01H XXH XXH

This message is sent from either the initiator or the drive to indicate that the message is an EXTENDED MESSAGE. The drive only supports only the SYNCHRONOUS DATA TRANSFER REQUEST(SDTR) message.

An SDTR message exchange shall be initiated by a SCSI device whenever a previously-arranged data transfer agreement becomes invalid. The drive does not initiate the synchronous negotiation, but is capable to handle this message. The agreement becomes invalid after any condition which may leave the data transfer agreement in an intermediate status, such as:

- 1) after a hard reset condition performed by asserting RST signal;
- 2) after a BUS DEVICE RESET message;
- 3) after a power cycle.

In addition, an initiator may initiate an SDTR message exchange whenever it is appropriate to negotiate a new data transfer agreement (either synchronous or asynchronous). The SDTR message exchange establishes a permissible transfer period and the REQ/ACK offset for all logical units and target routines on the two devices. This agreement only applies to DATA phases. The format of the SDTR message is as follows:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|-------|-------|-------|-------|-------|-------|
| 0 | Extended Message (01H) | | | | | | | |
| 1 | Extended Message length (03H) | | | | | | | |
| 2 | SYNCHRONOUS DATA TRANSFER REQUEST code (01H) | | | | | | | |
| 3 | Transfer Period Factor (m times 4 nanoseconds) | | | | | | | |
| 4 | REQ/ACK Offset (x) | | | | | | | |

The transfer period is the minimum time allowed between leading edges of successive REQ pulses and ACK pulses.

The REQ/ACK offset is the maximum number of REQ pulses allowed to be outstanding before the leading edge of its corresponding ACK pulse is received at the target. This value is chosen to prevent the overflow conditions in the device's reception buffer and offset counter. A REQ/ACK offset value of zero indicates asynchronous mode.

The initiator sets its values according to the rules stated above to receive data successfully. If the drive can also receive data successfully with these values (or smaller transfer period or larger REQ/ACK offset or both), it returns the same values in its SDTR message. If it requires a longer transfer period, a smaller REQ/ACK offset, or both in order to receive data successfully, it alters SDTR message values as required. When transmitting data, each device shall respect the

PHASES

limits set by the other's SDTR message, but it is permitted to transfer data with larger transfer periods, smaller REQ/ACK offsets, or both exceeding the specified limits of the other's SDTR message.

The implied synchronous agreement shall remain in effect until a BUS DEVICE RESET message is received; until a hard reset condition occurs; or until the initiator elects to modify the agreement. The default data transfer mode is asynchronous data transfer mode. The default data transfer mode is set at power on, after a BUS DEVICE RESET message, or after a hard reset condition.

Caution:

The ANSI SCSI-2 standard recommends to set limits to the cable length and system configuration of the single end bus. And it is also suggested that the characteristic impedance of the cable should be within 90 to 132 Ω .

Synchronous negotiation started by the initiator

If the initiator recognizes that a negotiation is required, it asserts an ATN signal and sends an SDTR message to begin the negotiation process. After successfully completing the MESSAGE OUT phase, the drive will respond with the proper SDTR message. If an abnormal condition prevents the drive from returning an appropriate response, both devices shall turn into asynchronous mode for data transfer. The drive responds to each Initiator's Requested Transfer Period as shown in the following table:

| Initiator's Requested Transfer Period Factor | SMO-F561 | |
|--|----------|------------------------------------|
| | Response | Transfer Period |
| (Ultra SCSI Enabled) | | |
| 0 ≤ mi ≤ 12 | mt = 12 | 50 nsec |
| 13 ≤ mi ≤ 18 | mt = 18 | 75 nsec |
| 19 ≤ mi ≤ 25 | mt = 25 | 100 nsec |
| (Fast SCSI Enabled) | | |
| 0 ≤ mi ≤ 25 | mt = 25 | 100 nsec |
| 26 ≤ mi ≤ 31 | mt = mi | 125 nsec |
| 32 ≤ mi ≤ 37 | mt = mi | 150 nsec |
| 38 ≤ mi ≤ 43 | mt = mi | 175 nsec |
| 44 ≤ mi ≤ 50 | mt = mi | 200 nsec |
| (Fast SCSI Disabled) | | |
| 0 ≤ mi ≤ 50 | mt = 50 | 200 nsec |
| 51 ≤ mi ≤ 56 | mt = mi | 225 nsec |
| 57 ≤ mi ≤ 62 | mt = mi | 250 nsec |
| 63 ≤ mi ≤ 68 | mt = mi | 275 nsec |
| 69 ≤ mi ≤ 75 | mt = mi | 300 nsec |
| 76 ≤ mi ≤ 225 | mt = mi | Asynchronous (REQ/ACK offset 0) |

The drive responds to each initiator's requested REQ/ACK offset as follows:

| Initiator's Requested REQ/ACK Offset | SMO-F561 | |
|--------------------------------------|----------|----------------|
| | Response | REQ/ACK Offset |
| 0 ≤ xi ≤ 15 | xt = xi | xt |
| 15 < xj ≤ 255 | xt = 15 | 15 |

SAVE DATA POINTER 02H

This message is sent from the drive to direct the initiator to save the address of the present active data pointer for currently attached logical unit. The drive issues this message when it disconnects the SCSI BUS during the data transfer or when a block of data is transferred.

RESTORE POINTERS 03H

This message is sent from the drive to direct the initiator to restore the most recently saved pointers to an active state. The drive may send this message when INITIATOR DETECTED ERROR message is sent from the initiator during STATUS phase.

DISCONNECT 04H

This message is sent from the drive to inform the initiator that the present physical path is going to be disconnected, but a later reconnection will be required in order to complete the current operation.

INITIATOR DETECTED ERROR 05H

This message is sent from an initiator to inform a target that an error has occurred that does not preclude the target from retrying the operation. When the drive receives this message during STATUS phase, it may retry the transfer after sending RESTORE POINTERS message.

ABORT 06H

This message is sent from the initiator to the drive to clear the present operation and all the pending command to the drive. All the pending data and status made by the current command is cleared, too, and the drive turns into BUS FREE phase. Pending data and status for other initiators are not cleared. No status or ending message is sent for this operation.

MESSAGE REJECT 07H

This message is sent from either the initiator or the drive to indicate that the last message was inappropriate or has not been implemented.

When the drive receives a MESSAGE REJECT message from the initiator, it takes the following action based on which message is rejected.

COMMAND COMPLETE: The drive turns into BUS FREE phase and does not consider this as an error.

DISCONNECT: The drive does not disconnect and continues the current command.

IDENTIFY: The drive turns into the BUS FREE phase and aborts the command. Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 0BH/43H/00H (ABORTED COMMAND/Message Error).

LINKED COMMAND COMPLETE or **LINKED COMMAND COMPLETE (WITH FLAG):** The drive turns into BUS FREE phase and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 0BH/43H/00H (ABORTED COMMAND/Message Error).

MESSAGE REJECT: The drive terminates the command with CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 0BH/43H/00H (ABORTED COMMAND/Message Error).

RESTORE POINTERS: The drive turns into the BUS FREE phase and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier according to the error condition.

SAVE DATA POINTER: The drive does not disconnect and continues the current command.

SIMPLE QUEUE TAG: The drive turn into the BUS FREE phase and aborts the I/O process. Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 0BH/43H/00H(ABORTED COMMAND/Message Error).

SYNCHRONOUS DATA TRANSFER REQUEST(SDTR): The drive goes to

PHASES

asynchronous data transfer mode for data transfers with the initiator and continues the current command.

NO OPERATION 08H

This message is ignored by the drive.

MESSAGE PARITY ERROR 09H

When the drive receives this message, it retries the operation by resending the original message once. If the message cannot be sent successfully, the drive immediately turns into the BUS FREE phase and aborts the current SCSI command. No further reconnection is attempted and no status or COMMAND COMPLETE message is returned.

LINKED COMMAND COMPLETE 0AH

This message is sent from the drive to an initiator to indicate that the execution of LINKED COMMAND has been completed and the status has been sent.

LINKED COMMAND COMPLETE (WITH FLAG) 0BH

This message is sent from the drive to an initiator to indicate that the execution of LINKED COMMAND (with the flag bit set to 1) has been completed and the status has been sent.

BUS DEVICE RESET 0CH

This message is sent from an initiator to reset the drive.

ABORT TAG 0DH

The drive turns into the BUS FREE phase following a successful receipt of the ABORT TAG message and clears the current I/O process. If the drive has already started the execution of I/O process, the execution will be halted. The medium contents may be modified before the execution is halted.

CLEAR QUEUE 0EH

The drive turns into the BUS FREE phase following a successful receipt of the CLEAR QUEUE message. The drive clears all I/O process from all the initiators in the queue for the specified logical unit from the queue. All the active I/O process are terminated. The medium may have been altered by partially executed commands. All the pending status and data for the specified logical unit are cleared. UNIT ATTENTION condition is generated for all the other initiators with I/O process that either were active or were queued for the logical unit. Additional Sense Code/Additional Sense Code Qualifier is set to 2FH/00H (Command Cleared by Another Initiator).

QUEUE TAG MESSAGES (20H XXH, 21H XXH, 22H XXH)

The drive supports SIMPLE QUEUE TAG, HEAD OF QUEUE TAG and ORDERED QUEUE TAG. The Queue Tag Message consist of two consecutive bytes, Message Code (20H, 21H or 22H) and Queue Tag (00H-FFH) to distinguish each I/O process. The Queue Tag must be unique for each I/O process, but the numeric values of queue tags have no effect on the order of execution.

SIMPLE QUEUE TAG 20H XXH

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Message Code (20H) | | | | | | | |
| 1 | Queue Tag (00H - FFH) | | | | | | | |

The SIMPLE QUEUE TAG message specifies that the I/O process will be placed in the logical unit's command queue. Order of the execution may be altered.

HEAD OF QUEUE TAG 21H XXH

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Message Code (21H) | | | | | | | |
| 1 | Queue Tag (00H - FFH) | | | | | | | |

The HEAD OF QUEUE TAG message specifies that the I/O process will be placed at first in the logical unit's command queue. When the drive receives a subsequent I/O process received with a HEAD OF QUEUE TAG message, the I/O process which has been already requested is not interrupted.

ORDERED QUEUE TAG 22H XXH

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Message Code (22H) | | | | | | | |
| 1 | Queue Tag (00H - FFH) | | | | | | | |

The ORDERED QUEUE TAG message specifies that the I/O process will be placed in the logical unit's command queue for execution in the received order. All the queued I/O processes for the logical unit received prior to this I/O process are executed before this I/O process is executed. All the queued I/O processes received after the I/O process are executed after this I/O process, except for I/O process received with a HEAD OF QUEUE TAG message.

IDENTIFY 80H-FFH

These messages are sent by either the initiator or the drive to establish a physical path connection between the initiator and the drive.

Bit 7 This bit is always set to 1.

Bit 6 This bit is set to 1 by the initiator to indicate that the initiator has been granted an ability to accommodate the disconnection and reconnection.

Bit 5-3 This bit is reserved.

Bit 2-0 These bits specify a logical unit number.

2.1.8 STATUS phase

A status byte is sent from the drive to the initiator during the STATUS phase at the termination of each command unless the command is cleared by an ABORT, BUS DEVICE RESET, ABORT TAG, CLEAR QUEUE message, or RESET condition. The drive supports the following status codes:

| Code | Status |
|-------------|----------------------------|
| 00H | GOOD |
| 02H | CHECK CONDITION |
| 04H | CONDITION MET |
| 08H | BUSY |
| 10H | INTERMEDIATE/GOOD |
| 14H | INTERMEDIATE-CONDITION MET |
| 18H | RESERVATION CONFLICT |
| 28H | QUEUE FULL |

GOOD 00H

This status indicates that the target has successfully completed the command.

CHECK CONDITION 02H

Any error, exception, or abnormal condition that causes sense data to be set, causes a CHECK CONDITION status. The REQUEST SENSE command should be issued following a CHECK CONDITION status, to determine the nature of the condition.

CONDITION MET 04H

This status or INTERMEDIATE-CONDITION MET is returned when the PRE-FETCH or the MEDIUM SCAN operation is satisfied. (See the PRE-FETCH and the MEDIUM SCAN commands).

BUSY 08H

This status is returned by the drive during the power-up until all the diagnostics have been completed. The status may be also returned by the drive when the drive is executing another command.

INTERMEDIATE/GOOD 10H

Unless an error, exception, or abnormal condition causes a CHECK CONDITION status or a RESERVATION CONFLICT status, the INTERMEDIATE/GOOD status is returned for every command in series of linked commands, excluding the last command. If this status is not returned, the chain of linked commands is broken; no further commands in the series are executed.

INTERMEDIATE-CONDITION MET 14H

This status is the combination of the CONDITION MET and INTERMEDIATE status.

RESERVATION CONFLICT 18H

This status is returned when a SCSI device attempts to access a logical unit which is reserved for another initiator.

QUEUE FULL 28H

This status is returned when any of the SIMPLE QUEUE TAG, ORDERED QUEUE TAG, or HEAD OF QUEUE TAG message is received and the command queue of the drive is full. The I/O process is not placed in the command queue. The drive can handle thirty two I/O process at a time.

2.2 SCSI BUS CONDITIONS

2.2.1 ATTENTION condition

The ATTENTION condition allows an initiator to inform the drive that the initiator has a message ready. The drive gets this message by performing a MESSAGE OUT phase as follows.

- a) If the ATN signal becomes true during a COMMAND phase, the drive enters MESSAGE OUT phase after transferring part or all of the command descriptor block bytes.
- b) If the ATN signal becomes true during a DATA phase, the drive enters MESSAGE OUT phase at the drive's earliest convenience. The initiator shall continue REQ/ACK handshakes until it detects the phase change.
- c) If the ATN signal becomes true during a STATUS phase, the drive enters MESSAGE OUT phase after the status byte has been acknowledged by the initiator.
- d) If the ATN signal becomes true during a MESSAGE IN phase, the drive enters MESSAGE OUT phase before it sends another message.
- e) If the ATN signal becomes true before the initiator releases the BSY signal during a SELECTION phase, the drive enters MESSAGE OUT phase immediately after that SELECTION phase.
- f) If the ATN signal becomes true during a RESELECTION phase, the drive enters MESSAGE OUT phase after the drive has sent its IDENTIFY message for that RESELECTION phase.

2.2.2 RESET condition

The drive implements the hard reset alternative upon detection of the RESET condition. When the drive sets a reset condition, it clears all I/O processes including queued I/O processes and releases all the reservations. It also resets all the SCSI device's operating modes (MODE SELECT, PREVENT/ALLOW MEDIUM REMOVAL commands, etc.) to their initial conditions and generates UNIT ATTENTION condition.

2.2.3 UNIT ATTENTION condition

A UNIT ATTENTION condition for a logical unit begins for each initiator when the medium is loaded (inserted into the drive unit), the drive is reset, or MODE SELECT parameters are changed. The UNIT ATTENTION condition persists for each initiator until that initiator issues a command to the logical unit other than the REQUEST SENSE or INQUIRY for which the drive returns the CHECK CONDITION status. If the next command from that initiator to the logical unit (following the CHECK CONDITION status) is REQUEST SENSE, UNIT ATTENTION Sense Key is returned. (If any command other than REQUEST SENSE is received, the UNIT ATTENTION condition is lost.)

If an INQUIRY command is received from an initiator with a pending UNIT ATTENTION condition (before the drive reports CHECK CONDITION status), the drive performs the INQUIRY command and does not clear the UNIT ATTENTION.

If a REQUEST SENSE command is received from an initiator with a pending UNIT ATTENTION condition (before the drive reports CHECK CONDITION status), the drive reports UNIT ATTENTION Sense Key and clears the UNIT ATTENTION condition for that initiator.

2.3 DISK FORMAT

The drive will manage a 130 mm Magneto-Optical Drive and disk as an optical memory device under the SCSI-2 operating definition. It supports the ISO/IEC standard for 130 mm Optical Disk and the defect management scheme described by the standard.

The drive supports three disk-management mode, Format Mode 3, Format Mode 4 and Format Mode 5. The Format Mode 3 is for the 650 Mbyte/cartridge medium and the Format Mode 4 corresponds to the 1.2, 1.3 Gbyte/cartridge, 2.3, 2.6 Gbyte/cartridge, 4.1, 4.8, 5.2 Gbyte/cartridge and 8.6, 9.1 Gbytes/cartridge (4096 byte/sector) medium. Format Mode 5 is for the 9.1 Gbyte/cartridge (emulation for 512 and 1024 byte/sector) medium.

Format Mode 3

The Format Mode 3 is for 600 Mbyte/cartridge and 650 Mbyte/cartridge medium. In Format Mode 3, tracks from 0 to 2 and from 18748 to 18750 are used for DDS, PDL and SDL. And tracks from 3 to 18747 is used for user area (data blocks + spare blocks).

Format Mode 4

Format Mode 4 is for 1.2, 1.3 Gbyte/cartridge, 2.3,2.6 Gbyte/cartridge, 4.1, 4.8, 5.2 Gbyte/cartridge and 8.6, 9.1 Gbyte/cartridge (4096 byte/sector) medium.

For 1.3 Gbyte/cartridge media, tracks from 0 to 2 and from 37597 to 37599 are used for DDS, PDL and SDL. And tracks from 3 to 37596 is used for user area (data blocks + spare blocks).

For 2.6 Gbytes/cartridge media (1024 byte/sector), tracks from 0 to 4 and from 75722 to 75726 are used for DDS, PDL and SDL. And tracks from 5 to 75721 is used for user area (data blocks + spare blocks).

For 2.3 Gbyte/cartridge media (512 byte/sector), tracks from 0 to 4 and from 73067 to 73071 are used for DDS, PDL and SDL. And tracks from 5 to 73066 is used for user area (data blocks + spare blocks).

For 5.2 Gbyte/cartridge media (2048 byte/sector), tracks from 0 to 5 and from 182482 to 182487 are used for DDS, PDL and SDL. And tracks from 6 to 182481 is used for user area (data blocks + spare blocks).

For 4.8 Gbyte/cartridge media (1024 byte/sector), tracks from 0 to 5 and from 138894 to 138899 are used for DDS, PDL and SDL. And tracks from 6 to 138893 is used for user area (data blocks + spare blocks).

For 4.1 Gbyte/cartridge media (512 byte/sector), tracks from 0 to 5 and from 130091 to 130096

are used for DDS, PDL and SDL. And tracks from 6 to 130090 is used for user area (data blocks + spare blocks).

For 9.1 Gbyte/cartridge media (4096 byte/sector), tracks from 0 to 5 and from 93214 to 93219 are used for DDS, PDL and SDL. And tracks from 6 to 93213 is used for user area (data blocks + spare blocks).

For 8.6 Gbyte/cartridge media (2048 byte/sector), tracks from 0 to 5 and from 150410 to 150415 are used for DDS, PDL and SDL. And tracks from 6 to 150409 is used for user area (data blocks + spare blocks).

Format Mode 5

Format Mode 5 is for 9.1 Gbyte/cartridge 512 and 1024 sector medium.


For 9.1 Gbyte/cartridge medium (512 and 1024 byte/sector), tracks from 0 to 5 and from 93214 to 93219 are used for DDS, PDL and SDL. And tracks from 6 to 93213 is used for user area (data blocks and spare blocks).

ISO/IEC standard defect management scheme

The disk is divided into several areas and is managed by the SMO-F551.


The following figure shows how 650 Mbyte and 1.3 Gbyte media is managed:

([] 1.3Gbyte/cartridge medium, () 512byte medium)

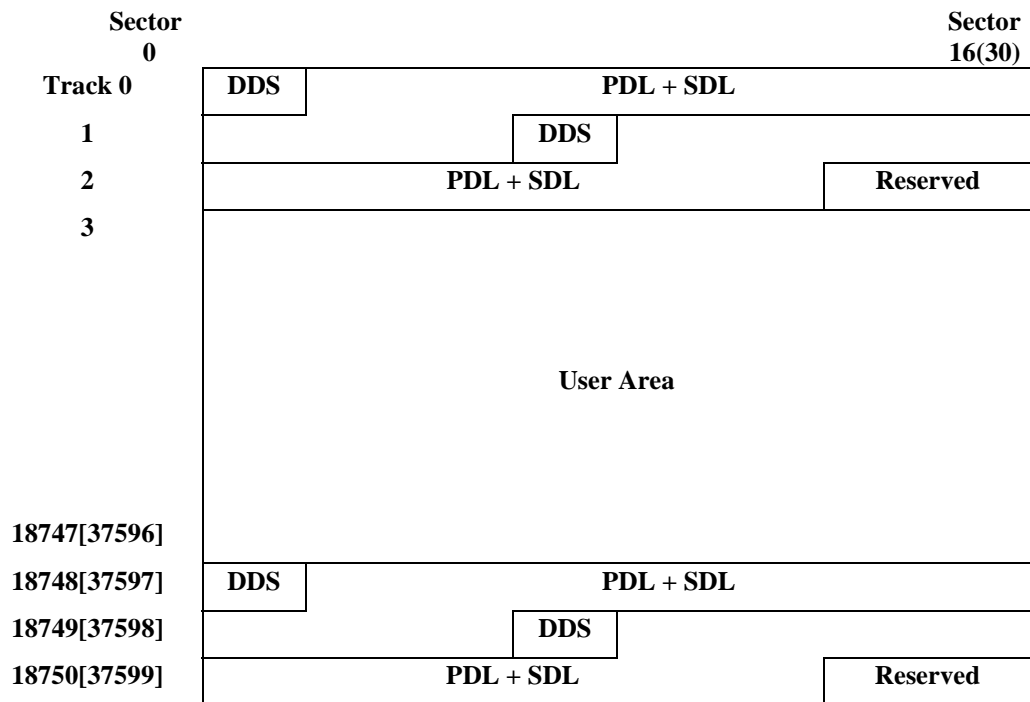

The following figure shows how 2.6 Gbyte media is managed:

([] 2.3Gbyte/cartridge medium, () 512byte medium)

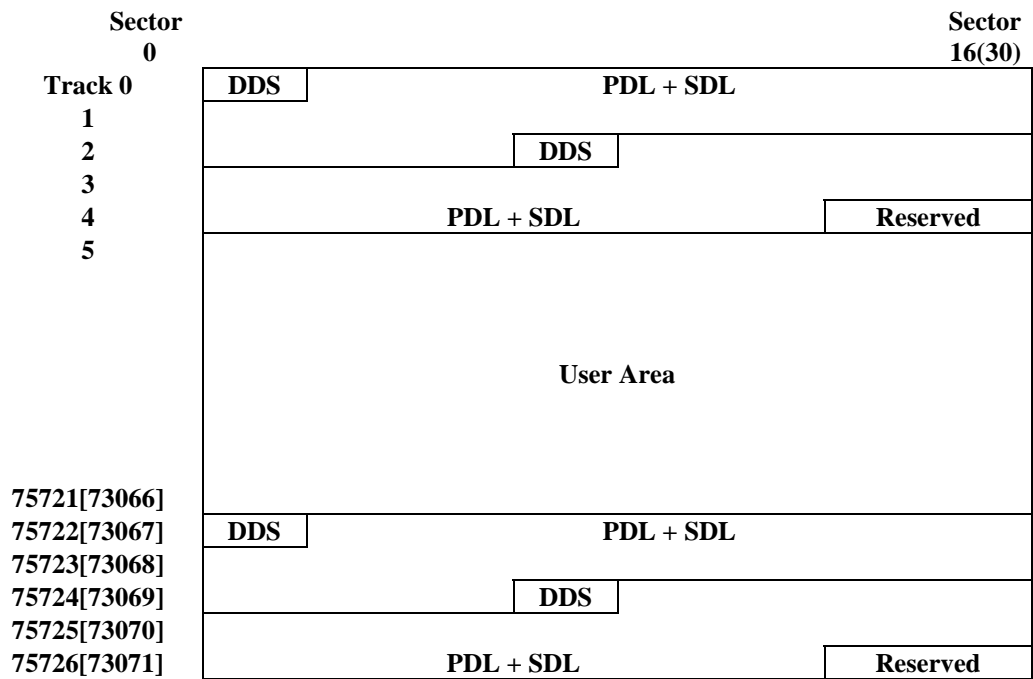

DISK FORMAT

The following figure shows how 5.2 Gbyte is managed:

- 5.2 Gbyte media : 2048 byte / sector
- 4.8 Gbyte media : 1024 byte / sector
- 4.1 Gbyte media : 512 byte / sector
- (2048 byte / 1024 byte / 512 byte medium)


| | Sector 0 | Sector 6 / 16 / 30 |
|-----------------------------|-------------|-----------------------|
| Track 0 | DDS | |
| 1 | | PDL + SDL |
| 2 | | |
| 3 | DDS | |
| 4 | | PDL + SDL |
| 5 | | |
| 6 | | User Area |
| 182481/138893/130090 | | |
| 182482/138894/130091 | DDS | |
| 182483/138895/130092 | | PDL + SDL |
| 182484/138896/130093 | | |
| 182485/138897/130094 | DDS | |
| 182486/138898/130095 | | PDL + SDL |
| 182487/138899/130096 | | |

The following figure shows how 9.1 Gbyte is managed:

9.1 Gbyte media : 4096 byte / sector

8.6 Gbyte media : 2048 byte / sector

(4096 byte / 2048 byte medium)

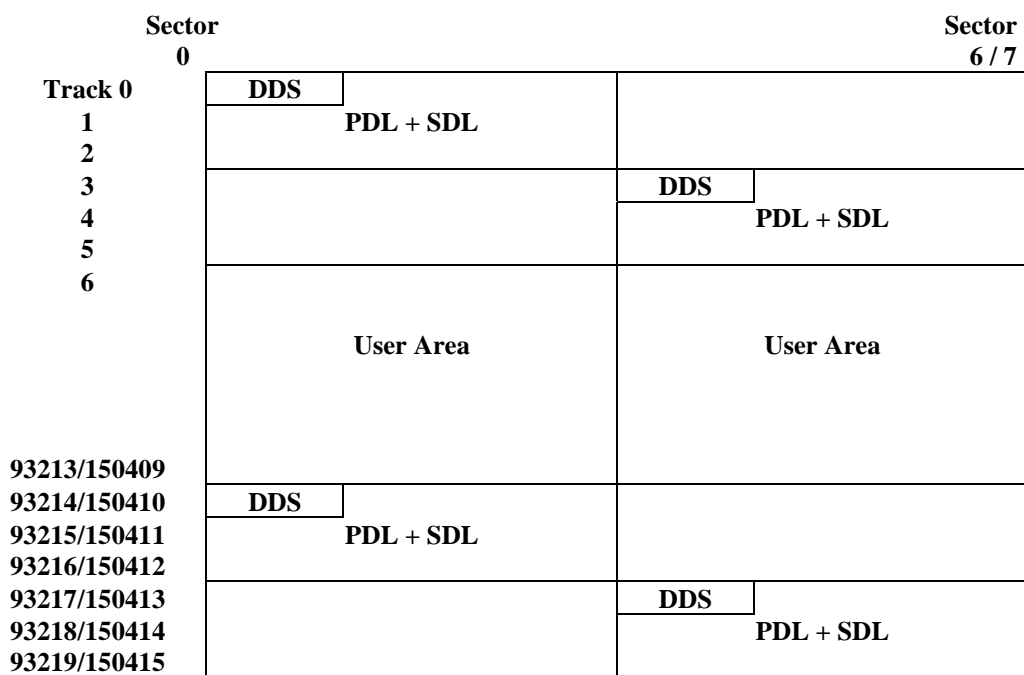

DDS (Disk Definition Structure) defines the defect allocation algorithm and the way the user and spare area is divided into data blocks and spare blocks. PDL (Primary Defect List) is established upon the certification of the medium. SDL (Secondary Defect List) is used to record defective sectors after the certification of the medium.

SECTION 3 COMMANDS

3.1 INTRODUCTION

This section describes detailed functions of each command supported by the drive. Commands under the SCSI-2 operating definition are described in this manual. Entries are arranged in order of the operation code.

Each entry includes:

- Command name
- Operation code
- Brief description of the command (FUNCTION)
- Command Descriptor Block (CDB)
- Detailed descriptions on each parameter

The following are explanations of each component:

Command name and operation code

Command name and operation code are printed at the first line of each entry in large fonts. The operation code is expressed in hexadecimal notation.

FUNCTION

Brief description on the command is described here.

CDB

This part describes the format of the command supported by the drive. The logical unit number field specifies the logical unit while the IDENTIFY message is not sent to the drive. If the logical unit is specified by the IDENTIFY message, content of this field is ignored by the drive. The link bit of 1 indicates that the drive links to the following command upon successful completion of the current command. When the command is terminated successfully, the drive returns an INTERMEDIATE/GOOD status and a LINKED COMMAND COMPLETE or a LINKED COMMAND COMPLETE (WITH FLAG) message depending on the state of the flag bit. The flag bit may be set to 1 only when the link bit is 1. If this bit and link bit are set to 1, the drive returns a LINKED COMMAND COMPLETE (WITH FLAG) message upon successful completion of the command. If this bit is set to 0, it returns the LINKED COMMAND COMPLETE message. During the linked commands, the logical unit number field value has to remain the same unless the logical unit number is specified by the IDENTIFY message. If the logical unit number field is

different from the value of the previous CDB, the command returns a CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 05H/25H/00H (ILLEGAL REQUEST/Logical Unit Not Supported).

Some group 1 or group 5 commands have a Relative Address (RelAdr) bit. The RelAdr bit is set to 1 to indicate that the Logical Block Address of the Command Descriptor Block is a displacement expressed with two's complement. This negative or positive displacement is added to the Logical Block Address accessed last.

The Reserved (or Rsvd) field indicates that the field is reserved and has to be set to 0 by the initiator.

Detailed descriptions on each parameter

Detailed descriptions on the parameters under the SCSI-2 operating definition are explained.

3.2 COMMANDS under SCSI-2 Operating Definition

The drive supports the following group 0, group 1, group 2, group 5 and group 6 commands under SCSI-2 operating definition (upper 3 bits of the operation code is called group code).

Group 0 (6-byte command)

| Code | Description |
|-------------|-------------------------------------|
| 00H | TEST UNIT READY |
| 01H | REZERO UNIT |
| 03H | REQUEST SENSE |
| 04H | FORMAT UNIT |
| 07H | REASSIGN BLOCKS |
| 08H | READ(6) |
| 0AH | WRITE(6) |
| 0BH | SEEK(6) |
| 12H | INQUIRY |
| 15H | MODE SELECT(6) |
| 16H | RESERVE |
| 17H | RELEASE |
| 1AH | MODE SENSE(6) |
| 1BH | START/STOP UNIT |
| 1CH | RECEIVE DIAGNOSTIC RESULTS |
| 1DH | SEND DIAGNOSTIC |
| 1EH | PREVENT/ALLOW MEDIUM REMOVAL |

Group 1 (10-byte command)

| Code | Description |
|-------------|-----------------------------|
| 25H | READ CAPACITY |
| 28H | READ(10) |
| 2AH | WRITE(10) |
| 2BH | SEEK(10) |
| 2CH | ERASE(10) |
| 2EH | WRITE AND VERIFY(10) |
| 2FH | VERIFY(10) |
| 34H | PRE-FETCH |
| 35H | SYNCHRONIZE CACHE |
| 37H | READ DEFECT DATA(10) |
| 38H | MEDIUM SCAN |
| 3BH | WRITE BUFFER |
| 3CH | READ BUFFER |
| 3EH | READ LONG |
| 3FH | WRITE LONG |

Group 2 (10-byte command)

| Code | Description |
|-------------|--------------------------|
| 40H | CHANGE DEFINITION |
| 4CH | LOG SELECT |
| 4DH | LOG SENSE |
| 55H | MODE SELECT(10) |
| 5AH | MODE SENSE(10) |

Group 5 (12-byte command)

| Code | Description |
|-------------|-----------------------------|
| A8H | READ(12) |
| AAH | WRITE(12) |
| ACH | ERASE(12) |
| AEH | WRITE AND VERIFY(12) |
| AFH | VERIFY(12) |
| B7H | READ DEFECT DATA(12) |

Group 6 (10-byte command)

| Code | Description |
|-------------|--------------------|
| DEH | READ LONG |
| DFH | WRITE LONG |

TEST UNIT READY**00H****FUNCTION**

Determines the READY state of the drive. If the drive is in a READY state when it receives this command, it returns a GOOD status. The drive is in a READY state when the optical disk is loaded and spun up, and medium-access command can be successfully completed.

If the drive is not READY when it receives this command, it returns a CHECK CONDITION status with Sense Key of NOT READY.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (00H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

REZERO UNIT**01H****FUNCTION**

Function of this command is exactly the same with the function of TEST UNIT READY command.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (01H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

REQUEST SENSE**03H****FUNCTION**

REQUEST SENSE command is used to identify the error condition when the drive fails to complete a command and returns a CHECK CONDITION status. Sense Data is preserved for the initiator until it is retrieved by a REQUEST SENSE command or until the drive receives another command.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (03H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Allocation Length | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

Allocation Length

This field indicates the number of sense data bytes that the drive will transfer to the initiator. This drive has 22 bytes of sense data. If an allocation length specified is less than 22, then the allocated amount is transferred while the remaining sense data is lost, and no error will be reported. If the specified allocation length is greater than 22, then only 22 bytes of sense data are transferred and no error will be reported.

Sense Data Format

The table below shows the format of the Sense Data which consists of twenty two bytes:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------------------|--------------------------------|---------|-----------|-------|-------|-------|-------|
| 0 | Valid | Error Code (70H or 71H) | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Reserved | ILI | Reserve | Sense Key | | | | |
| 3 | Information Byte (MSByte) | | | | | | | |
| 4 | Information Byte | | | | | | | |
| 5 | Information Byte | | | | | | | |
| 6 | Information Byte (LSByte) | | | | | | | |
| 7 | Additional Sense Length (0EH) | | | | | | | |
| 8 | Command Specific Information (MSByte) | | | | | | | |
| 9 | Command Specific Information (MSByte) | | | | | | | |
| 10 | Command Specific Information (LSByte) | | | | | | | |
| 11 | Command Specific Information (LSByte) | | | | | | | |
| 12 | Additional Sense Code | | | | | | | |
| 13 | Additional Sense Code Qualifier | | | | | | | |
| 14 | Reserved | | | | | | | |
| 15 | SKSV | Sense Key Specific Information | | | | | | |
| 16 | Sense Key Specific Information | | | | | | | |
| 17 | Sense Key Specific Information | | | | | | | |
| 18 | Internal Error Code (MSByte) | | | | | | | |
| 19 | Internal Error Code | | | | | | | |
| 20 | Internal Error Code | | | | | | | |
| 21 | Internal Error Code (LSByte) | | | | | | | |

Valid

Valid bit of 1 indicates that Information Byte field contains valid information related to Additional Sense Code and Additional Sense Code Qualifier.

ILI

An incorrect length indicator(ILI) bit of 1 indicates that the requested logical block length did not match the logical block length of the data on the medium.

Error Code

Error code 70H indicates that returned CHECK CONDITION status is the result of an error condition of the I/O process. Error Code 71H (deferred error) indicates that the returned CHECK

CONDITION status is the result of an error or exceptional condition that occurred during the execution of a previous command for which GOOD status has already been returned. Such commands are associated with the use of immediate bit or some forms of caching.

Sense Key

Sense Key provides generic categories in which errors or exceptional conditions can be reported.

The following Sense Keys are implemented in the drive:

| Sense Key | Description |
|-----------|---|
| 0H | NO SENSE Indicates that there is no specific Sense Key information to be reported for the designated logical unit. This Sense Key is returned when the command is successfully completed. |
| 1H | RECOVERED ERROR Indicates that the last command is successfully completed with some recovery action performed by the drive. |
| 2H | NOT READY Indicates that the logical unit cannot be accessed. |
| 3H | MEDIUM ERROR Indicates that the command is terminated with an unrecovered error condition caused by a medium defect. |
| 4H | HARDWARE ERROR Indicates that the drive has detected a hardware error. |
| 5H | ILLEGAL REQUEST Indicates that there is an illegal parameter in the Command Descriptor Block or in the additional parameters supplied as data for some commands. |
| 6H | UNIT ATTENTION Indicates that the medium has been loaded and the unit has been reset or the Mode Select parameters have been changed. |
| 7H | DATA PROTECT Indicates that a write command is attempted but cannot be performed due to the Write Protect setting of the medium cartridge switch. |
| 8H | BLANK CHECK A blank sector was detected during READ or VERIFY command, or a written sector was detected during WRITE, VERIFY or WRITE AND VERIFY command. |
| BH | ABORTED COMMAND Indicates that the drive has aborted the last command. The initiator may be able to recover by trying the command again. |
| CH | EQUAL. Indicates a MEDIUM SCAN command has satisfied an equal comparison. |

Information Byte

If Valid bit is set to 1, Information Byte contains valid information related to Additional Sense Code and Additional Sense Code Qualifier.

Additional Sense Length

Additional Sense Length indicates the length of data which follows this field. When the allocation length of the Command Descriptor Block is too small to transfer all the additional sense bytes, Additional Sense Length is not adjusted to reflect the truncation.

Command Specific Information

The command specific information field contains information that depends on the command that was executed. Further meaning of this field is defined with in the command description.

Additional Sense Code and Additional Sense Code Qualifier

Additional Sense Code and Additional Sense Code Qualifier further defines the Sense Key.

SKSV

Sense Key Specific Valid bit being 1 indicates that Sense Key Specific Information is valid. This bit is set to 1 only when the Sense Key is set to ILLEGAL REQUEST. Sense Key Specific Valid bit of 0 indicates that there is no Sense Key Specific Information.

Sense Key Specific Information for ILLEGAL REQUEST

If the Sense Key is ILLEGAL REQUEST and the SKSV bit is set to one, the Sense Key Specific Information field is defined as the following table. This information indicates which parameters in Command Descriptor Blocks or data parameters has an error.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|------------------------|-------|----------|-------|-------|-------------|-------|-------|
| 15 | SKSV | C/D | Reserved | | BPV | Bit Pointer | | |
| 16 | Field Pointer (MSByte) | | | | | | | |
| 17 | Field Pointer (LSByte) | | | | | | | |

C/D

Command Data bit of 1 indicates that illegal parameter exist in the Command Descriptor Block. This bit of 0 indicates that illegal parameters are in the data parameters sent by the initiator during the DATA OUT phase.

BPV

Bit Pointer Valid bit of 0 indicates that value in the Bit Pointer field is not valid. Bit Pointer Valid bit of 1 indicates that Bit Pointer field specifies a valid information.

Bit Pointer

When the Bit Pointer Valid bit is 1, Bit Pointer field specifies which bit of byte designated by the Field Pointer field has an error. When multiple-bit field is in error, the Bit Pointer field points to the most significant bit of the field.

Field Pointer

Field Pointer field indicates which byte of the Command Descriptor Block or the parameter data has an error. Bytes are numbered starting from 0, as shown in the tables describing the commands and parameters. When a multiple-byte field is in error, the bit pointer field points to the most-significant byte of the field.

Sense Key Specific Information for NOT READY

If the Sense Key is NOT READY and the SKSV bit is set to one, the Sense Key Specific Information field is defined as the following table. These fields only apply to the FORMAT UNIT command with the Immed bit set to 1.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|------------------------------|----------|-------|-------|-------|-------|-------|-------|
| 15 | SKSV | Reserved | | | | | | |
| 16 | Progress Indication (MSByte) | | | | | | | |
| 17 | Progress Indication (LSByte) | | | | | | | |

Internal Error Code

Please refer to Appendix A: Internal Error Code for information on failures.

Additional Sense Code and Additional Sense Code Qualifier

Additional Sense Code (ASC) and Additional Sense Code Qualifier (ASCQ) provide either detailed error information or the drive condition. The following lists show the ASC's and ASCQ's implemented by the drive and the related Sense Keys.

| ASC | ASCQ | Description |
|------------|-------------|--|
| 00H | 00H | No Additional Sense Information (NO SENSE) No Additional Sense Information to be reported. |
| 03H | 00H | Write Fault (HARDWARE ERROR) Error in write operation. |
| 04H | 00H | Drive Not Ready (NOT READY) READY signal from the drive block was negated. |
| 04H | 01H | Logical Unit is in Process of Becoming Ready (NOT READY) The drive is in process of becoming READY while loading or spinning up. |
| 04H | 04H | Logical Unit Not Ready, Format in Progress (NOT READY) The drive is in process of formatting by FORMAT UNIT command. |
| 09H | 01H | Tracking Servo Failure (HARDWARE ERROR) Tracking servo failed. |
| 09H | 02H | Focus Servo Failure (HARDWARE ERROR) Focus servo failed. |
| 09H | 03H | Spindle Servo Failure (HARDWARE ERROR) Spindle motor is not at the specified speed. |
| 0CH | 01H | Write Error Recovered with Auto Reallocation (RECOVERED ERROR) Automatic write reallocation was executed successfully. |
| 0CH | 02H | Write Error Auto Reallocation Failed (MEDIUM ERROR) Automatic write reallocation failed to recover write error. |
| 10H | 00H | ID CRC Error (HARDWARE ERROR) The ID field cannot be read. |

| ASC | ASCQ | Description |
|-----|------|--|
| 11H | 00H | Unrecovered Read Error of Data Block (MEDIUM ERROR) Data error could not be corrected by the Error Correction Code. The Logical Block Address where the error was detected may be returned in the Logical Block Address field or the Information Byte field of the sense data. |
| 15H | 00H | Random Positioning Error (HARDWARE ERROR) Seek failure or not on correct track. |
| 16H | 00H | Data Synchronization Mark Error (MEDIUM ERROR) Data synchronization cannot be found. |
| 18H | 00H | Recovered Read Data with ECC Procedure (RECOVERED ERROR) Interleave containing 7 or 8 error bytes was located. Error correction was successful. |
| 18H | 01H | Recovered Data with retries (RECOVERED ERROR) Recovered by retry. |
| 19H | 01H | Defect List Not Available (MEDIUM ERROR or RECOVERED ERROR) Specified defect list is not available. |
| 1AH | 00H | Parameter List Length Error (ILLEGAL REQUEST) There is an error in the received Parameter List Length field. |
| 1BH | 00H | Synchronous Data Transfer Error (HARDWARE ERROR) Synchronous data transfer was missed. |
| 1CH | 00H | Defect List Not Found (MEDIUM ERROR) Defect list cannot be found. |
| 1CH | 01H | Primary Defect List Not Found (MEDIUM ERROR) Cannot read PDL. |
| 1CH | 02H | Grown Defect List Not Found (MEDIUM ERROR) Cannot read SDL. |
| 20H | 00H | Invalid Command Operation Code (ILLEGAL REQUEST) The specified command operation code is not implemented or an invalid commands is requested. |
| 21H | 00H | Logical Block Address Out of Range (ILLEGAL REQUEST) The specified Logical Block Address was outside of the valid area. |

| ASC | ASCQ | Description |
|-----|------|---|
| 24H | 00H | Illegal Field in CDB (ILLEGAL REQUEST) There is an error in the received Command Descriptor Block (CDB). This Additional Sense Code is returned under the following situations. -- A reserved field in CDB is not 0. -- Invalid combination of parameters – Illegal parameter at that state (e.g. A command using the relative address (RelAdr) bit set to 1 was issued after a command who's link bit was not 1). |
| 25H | 00H | Logical Unit Not Supported (ILLEGAL REQUEST) LUN 1 through 7 was specified or the specified LUN (0) did not respond to the selection from the SCSI controller block. |
| 26H | 00H | Invalid Parameter List (ILLEGAL REQUEST) The received parameter list contains invalid information. |
| 26H | 01H | Parameter Not Supported (ILLEGAL REQUEST) The received parameter(s) is/are not supported. |
| 26H | 02H | Parameter Value Invalid (ILLEGAL REQUEST) The received parameter(s) is/are invalid. |
| 27H | 00H | Write Protected (DATA PROTECT) Erasing or writing is aborted because the write protect switch of the cartridge is on. |
| 28H | 00H | Medium Changed (UNIT ATTENTION) Medium was loaded. This Additional Sense Code was used to notify the initiator that the medium had been changed since the execution of the last command. This code implies that the Mode Select Parameters might have been changed (2AH ; 00H). |
| 29H | 00H | Power On or Reset or Bus Device Reset Occurred (UNIT ATTENTION) This is used to notify the initiator that a RESET condition has taken place since the last execution of the command. This code implies that the Mode Select Parameters may be changed. |
| 2AH | 00H | Mode Select Parameters Changed (UNIT ATTENTION) This is used to notify the initiator that the mode select parameters have been changed since the execution of the last command. |
| 2FH | 00H | Command Cleared by Another Initiator (UNIT ATTENTION) The drive received the CLEAR QUEUE message. |

| ASC | ASCQ | Description |
|------------|-------------|--|
| 30H | 00H | Incompatible Cartridge (MEDIUM ERROR) The ID hole(s) location of the cartridge is/are invalid. |
| 30H | 02H | PEP Invalid (MEDIUM ERROR) PEP data is invalid. |
| 31H | 00H | Medium Format Corrupted (MEDIUM ERROR) PEP, SFP or/and DDS is/are invalid. |
| 32H | 00H | No Defect Spare Location Available (MEDIUM ERROR) The number of defect sectors listed on the PDL and SDL exceeded the limit. |
| 32H | 01H | Defect List Update Failure (MEDIUM ERROR) Updating of the defect table failed after the successful sparing of the data sector. |
| 39H | 00H | Saving Parameters Not Supported (ILLEGAL REQUEST) Cannot save the specified parameters. |
| 3AH | 00H | Medium Not Present (NOT READY) No disk. Medium is not inserted into the drive unit. |
| 3DH | 00H | Invalid Bits in Identify Message (ILLEGAL REQUEST) Reserved bits in Identify Message is set to one. |
| 3FH | 01H | Micro Code Changed (UNIT ATTENTION) Micro Code has been changed. |
| 40H | 80H | Bias Magnet Failure (HARDWARE ERROR) The bias magnet of the drive has failed. |
| 40H | 81H | Limited Laser Life (HARDWARE ERROR) Over-current was detected in the laser diode or the laser power was below the lower limit. |
| 40H | 84H | Temperature Alarm (HARDWARE ERROR) Internal temperature of the drive exceeded the limit. |
| 40H | 86H | Read Channel Calibration Failure (HARDWARE ERROR) An error occurred during the Read Channel calibration. |

| ASC | ASCQ | Description |
|------------|-------------|---|
| 40H | 87H | Unusual Servo Signal (HARDWARE ERROR) Unusual servo signal has been detected. |
| 40H | 88H | Sensor Failure (HARDWARE ERROR) Loading sensor failure was detected. |
| 40H | 90H | DSP Diag Error (HARDWARE ERROR) There was a diagnostic error in the DSP. |
| 40H | 91H | 12V Line Failure (HARDWARE ERROR) 12V line has not been supplied. |
| 40H | 92H | Media Type Recognition Error (HARDWARE ERROR) Media type cannot be distinguished. |
| 40H | 95H | Buffer Memory Test Error (HARDWARE ERROR) There was an error in the buffer memory test which checks the entire memory space. |
| 40H | 97H | DSP Communication Error (HARDWARE ERROR) DSP communication has failed. |
| 40H | 98H | DSP Down-Load Error (HARDWARE ERROR) DSP down-load has failed. |
| 40H | 99H | RAM Test Error (HARDWARE ERROR) There was an error during the RAM test. |
| 40H | 9AH | ODC Test Error (HARDWARE ERROR) There was an error during the ODC test. |
| 40H | 9DH | Focus bias Calibration Failure (HARDWARE ERROR) An error occurred during the focus bias calibration. |
| 43H | 00H | Message Error (ABORTED COMMAND) The command is aborted because the initiator rejected the message from the drive by issuing the MESSAGE REJECT message. |
| 44H | 00H | Internal Target Failure (HARDWARE ERROR) The drive detected an error related to the controller block hardware or firmware. |

| ASC | ASCQ | Description |
|------------|-------------|--|
| 45H | 00H | Reselection Time-out Error (ABORTED COMMAND) The time has run out during the reselection phase. |
| 47H | 00H | SCSI Parity Error (ABORTED COMMAND) The command was aborted due to parity error on the SCSI bus. |
| 48H | 00H | Initiator Detected Error Message Received (ABORTED COMMAND) The command was aborted because the INITIATOR DETECTED ERROR message was sent from the initiator. |
| 49H | 00H | Invalid Message Error (ABORTED COMMAND) The command was aborted due to an inappropriate illegal message from the initiator. |
| 4EH | 00H | Overlapped Commands Attempted (ABORTED COMMAND) Initiator attempted to reconnect to an I/O process. |
| 53H | 00H | Media Load/Eject Failure (HARDWARE ERROR) Failure was detected during loading or unloading the cartridge. |
| 53H | 02H | Medium Removal Prevented (ILLEGAL REQUEST) Cartridge is prevented to be removed. |
| 92H | 00H | Overwrite Attempted (BLANK CHECK) The drive attempted to write data on the written block. |
| 93H | 00H | Blank Sector Detected (BLANK CHECK) Blank block was detected. |
| 94H | 00H | Written Sector Detected (BLANK CHECK) Written block was detected. |

FORMAT UNIT

04H

FUNCTION

Initializes the optical disk.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|---------|----------|---------|--------|--------------------|-------|--------|
| 0 | Operation Code (04H) | | | | | | | |
| 1 | Logical Unit Number | | | FmtData | CmpLst | Defect List Format | | |
| 2 | Reserved | | | | | | MkCDA | MkPlst |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | ErsCbtI | Reserved | | | | Flag | Link |

FmtData

Format Data bit of 1 indicates that the FORMAT UNIT parameter list shall be transferred during the DATA OUT phase. The parameter list consists of a Defect List Header followed by zero or more Defect Descriptor(s). Format Data bit of 0 indicates that DATA OUT phase shall not occur. The source of defect information is not specified.

CmpLst

Complete List bit of 1 indicates that the previous GList is not applied to make the defect list. Complete List bit of 0 indicates that the previous GList is added to the defect list.

Defect List Format

Defect List Format can be either Block Format (0) or Physical Sector Format (5).

MkCDA and MkPlst

These bits have no effect on the drive.

ErsCntI

Erase Control bit of indicates that ERASE operation is automatically performed before writing the data when the drive is directed to perform the certify operation by the initiator. Erase Control bit of 1 surpasses the ERASE operation.

The Defect List Format may be in Block Format or Physical Sector Format. FmtData, CmpLst and Defect List Format fields should be set as one of the following:

| FmtData (bit 4) | CmpLst (bit 3) | Defect List Format | | | Description |
|-----------------------------------|-------------------|--------------------|---------|---------|--|
| | | (bit 2) | (bit 1) | (bit 0) | |
| 0 | 0 | 0 | 0 | 0 | No Defect List Header and no Defect Descriptor |
| 1 | x | 0 | 0 | 0 | Block Format |
| 1 | x | 1 | 0 | 1 | Physical Sector Format |
| All other codes (x: arbitrary) | | | | | Reserved |

Defect List Format of unformatted medium should be in the Physical Sector Format.

Write-Once medium

For Write-Once media, this command can be executed only once during the lifetime of the disk. When an initiator attempts to execute the Format Unit command more than once, CHECK CONDITION status is returned. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 05H/20H/00H (ILLEGAL REQUEST/Invalid Command Operation Code). Also, the Defect List Format should be in the Physical Sector Format.

Note:

When this command is issued while 600/650 Mbyte media and 1.2/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

When the FmtData bit is 1, the drive goes into DATA OUT phase and receives the Defect List from the initiator. The length of the Defect Descriptors varies with the format of the Defect List. The Defect List format is as follows:

| Defect List Header | | | | | | | | |
|-----------------------------|-----------------------------|-------|-------|----------|-------|-------|----------|-------|
| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
| 0 | Reserved | | | | | | | |
| 1 | FOV | DPRY | DCRT | Reserved | | Immed | Reserved | |
| 2 | Defect List Length (MSByte) | | | | | | | |
| 3 | Defect List Length (LSByte) | | | | | | | |
| Defect Descriptor(s) | | | | | | | | |
| 4 | Defect Descriptor 1 | | | | | | | |
| | | | | | | | | |
| M | | | | | | | | |
| m + 1 | Defect Descriptor 2 | | | | | | | |
| | | | | | | | | |
| N | | | | | | | | |
| • • • | | | | | | | | |
| P | Defect Descriptor i | | | | | | | |
| | | | | | | | | |
| Q | | | | | | | | |

FOV

Format Options Valid bit of 1 indicates that the DPRY, DCRT and Immed bits contain valid information. Format Options Valid bit of 0 indicates that the DPRY, DCRT and Immed bits shall be in their default settings (all bits are set to zero).

DPRY

This bit has no effect on the drive.

DCRT

Disable Certification bit of 1 indicates that the drive does not certify the optical disk during the format process. Disable Certification bit of 0 indicates that the drive does certify the optical disk during the format process. When the FOV bit is set to 0, the DCRT bit must also be set to 0. DCRT does not apply to Write-Once disks.

Immed

Immediate bit of 1 indicates that status is returned as soon as the Command Descriptor Block has been validated. Immediate bit of 0 indicates that status is returned after command completion.

Defect List Length

Defect List Length is the total length of Defect Descriptors.

The followings are the formats of the Defect Descriptors:

Physical Sector Format

| Byte | Defect Descriptor |
|------|---------------------------------|
| 0 | Track Number of Defect (MSByte) |
| 1 | Track Number of Defect |
| 2 | Track Number of Defect(LSByte) |
| 3 | Reserved |
| 4 | Reserved |
| 5 | Reserved |
| 6 | Reserved |
| 7 | Sector Number Defect |

In the Physical Sector Format, the Track Number of Defect and Sector Number of Defect field indicate the physical track number and the physical sector number of the defect portion of the medium.

Block Format

| Byte | Defect Descriptor |
|------|-------------------------------|
| 0 | Reserved |
| 1 | Defect Block Address (MSByte) |
| 2 | Defect Block Address |
| 3 | Defect Block Address (LSByte) |

In Block Format, the Defect Block Address field indicates the Logical Block Address of the defective sector. Logical Block Address is converted to physical track/sector by the drive according to the current format mode of the medium.

In both format cases, the defective sector lists have to be in ascending sector order.

REASSIGN BLOCKS

07H

FUNCTION

Reassigns the defective sectors. A defect list containing the Logical Block Address to be reassigned is transferred to the drive. Data in the defective sector is moved to the replacement sector.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (07H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

Write-Once Medium

If this command is executed for a Write-Once medium, CHECK CONDITION status is returned. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 05H/20H/00H (ILLEGAL REQUEST/Invalid Command Operation Code).

Note:

When this command is issued while 600/650 Mbyte media and 1.2/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

Reassign Blocks Command Defect List

Reassign Blocks Command Defect List consists of four byte Defect List Header and zero or more Defect Descriptor(s) of size of four byte.

| Defect List Header | | | | | | | | |
|-----------------------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
| 0 | Reserved | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Defect List Length (MSByte) | | | | | | | |
| 3 | Defect List Length (LSByte) | | | | | | | |
| Defect Descriptor(s) | | | | | | | | |
| 4 | Defect Descriptor 1 | | | | | | | |
| | | | | | | | | |
| 7 | | | | | | | | |
| 8 | Defect Descriptor 2 | | | | | | | |
| | | | | | | | | |
| 11 | | | | | | | | |
| • • • | | | | | | | | |
| 4 x i | Defect Descriptor i | | | | | | | |
| | | | | | | | | |
| 4 x i + 3 | | | | | | | | |

Defect List Length

Defect List Length specifies the total length of Defect Descriptors that follow the Defect List Header and expressed in bytes.

The format of Defect Descriptor is shown below:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|-------|-------|-------|-------|-------|-------|
| 0 | Reserved | | | | | | | |
| 1 | Defective Logical Block Address (MSByte) | | | | | | | |
| 2 | Defective Logical Block Address | | | | | | | |
| 3 | Defective Logical Block Address (LSByte) | | | | | | | |

The Defect Sector List should be allocated in ascending order.

READ(6)**08H****FUNCTION**

Reads data from specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------------|----------|-------|--------------------------------|-------|-------|-------|-------|
| 0 | Operation Code (08H) | | | | | | | |
| 1 | Logical Unit Number | | | Logical Block Address (MSByte) | | | | |
| 2 | Logical Block Address | | | | | | | |
| 3 | Logical Block Address(LSByte) | | | | | | | |
| 4 | Transfer Length | | | | | | | |
| 5 | PBA | Reserved | | | | Flag | Link | |

Transfer Length

Transfer Length field specifies the number of contiguous logical blocks of data to be read. Transfer Length of 0 specifies that 256 logical blocks are to be read. Any other value specifies the number of logical blocks to be read.

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address will be given in the Logical Block Address field. Sector 0 of track 0 will always be set as Physical Block Address = 0. This bit of 0 indicates that logical block addressing is used.

Note:

When the drive is requested to read data on 2.3 Gbyte media, 4.1 Gbyte media, 4.8 Gbyte media, 8.6 Gbyte media and 9.1 Gbyte media (emulation for 512 and 1024 byte/sector, this command cannot handle Logical Block Address above 200,000 (1FFFFF H).

Unless the RC bit of the Read-Write Error Recovery Page (See the MODE SELECT command for more details) is set to 1, reading the data from the medium is corrected by Error Correction Code.

If a blank block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

WRITE(6)**0AH****FUNCTION**

Writes data to specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------------|---------|----------|--------------------------------|-------|-------|-------|-------|
| 0 | Operation Code (0AH) | | | | | | | |
| 1 | Logical Unit Number | | | Logical Block Address (MSByte) | | | | |
| 2 | Logical Block Address | | | | | | | |
| 3 | Logical Block Address(LSByte) | | | | | | | |
| 4 | Transfer Length | | | | | | | |
| 5 | PBA | ErsCntl | Reserved | | | | Flag | Link |

Transfer Length

Transfer Length field specifies the number of contiguous Logical Blocks of data to be written. Transfer Length of 0 specifies that 256 Logical Blocks of are to be written. Any other value specifies the number of Logical Blocks to be written.

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address will be given in the Logical Block Address field. Sector 0 of track 0 will always be set as Physical Block Address = 0. This bit of 0 indicates that logical block addressing is used.

ErsCntl

If the Erase Control bit is set to 0, an ERASE operation is automatically performed before writing the data. Erase Control bit of 1 suppresses the ERASE operation.

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

WRITE(6) (0AH)

Note:

When the drive is requested to write data on 2.3 Gbyte media, 4.1 Gbyte media, 4.8 Gbyte media, 8.6 Gbyte media and 9.1 Gbyte media (emulation for 512 and 1024 byte/sector), this command cannot handle Logical Block Address above 200,000 (1FFFF H).

Also, when this command is issued while 600/650 Mbyte media and 1.2/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

SEEK(6)**0BH****FUNCTION**

Moves the optical head to the physical track that address is specified in physical or logical address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------------|----------|-------|--------------------------------|-------|-------|-------|-------|
| 0 | Operation Code (0BH) | | | | | | | |
| 1 | Logical Unit Number | | | Logical Block Address (MSByte) | | | | |
| 2 | Logical Block Address | | | | | | | |
| 3 | Logical Block Address(LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | PBA | Reserved | | | | Flag | Link | |

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address will be given in the Logical Block Address field. Sector 0 of track 0 will always be set as Physical Block Address = 0. This bit of 0 indicates that logical block addressing is used.

Note:

When the drive is requested to seek 2.3 Gbyte media, 4.1 Gbyte media, 4.8 Gbyte media, 8.6 Gbyte media and 9.1 Gbyte media (emulation for 512 and 1024 byte/sector), this command cannot handle Logical Block Address above 200,000 (1FFFFFF H).

INQUIRY**12H****FUNCTION**

Requests the drive to send information to the initiator.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (12H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Allocation Length | | | | | | | |
| 5 | Reserved | | | | | Flag | | Link |

Allocation Length

This field specifies the number of bytes that the initiator has allocated for the data to be returned. Allocation length of 0 is not an error and indicates that no data will be returned. The initiator will terminate the data-in-phase when all available inquiry data has been returned or when allocation length byte has been returned, either with less length.

If an INQUIRY command is received from an initiator with pending UNIT ATTENTION condition (before the drive reports CHECK CONDITION status), the drive performs the INQUIRY command and does not clear the UNIT ATTENTION condition.

The INQUIRY data is returned in the following format:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-----------------------------------|----------------------|--------------|------------------------|--------|-----------------------|--------|-------|
| 0 | Peripheral Qualifier | | | Peripheral Device Type | | | | |
| 1 | RMB | Device Type Modifier | | | | | | |
| 2 | ISO Version | | ECMA Version | | | ANSI-Approved Version | | |
| 3 | Response Data Format | | | | | | | |
| 4 | Additional Length (1FH) | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | RelAdr | WBus32 | WBus16 | Sync | Linked | Reserved | CmdQue | SftRe |
| 8-15 | Vendor Identification (in ASCII) | | | | | | | |
| 16-31 | Product Identification (in ASCII) | | | | | | | |
| 32-35 | Product Revision Level (in ASCII) | | | | | | | |

Peripheral Qualifier, Peripheral Device Qualifier

Device Type will be set to 07H (Peripheral Qualifier and Peripheral Device Type will be set to 000b and 07H (Optical Memory Device)). If the Direct Access Inquiry Response (DAIR) bit of MODE SELECT command is set to 1, the Device Type will return 00H (Direct Access Device).

As the drive does not support Logical Unit Number 1 through 7, an INQUIRY command to the logical units with these numbers always returns 7FH (Peripheral Qualifier and Peripheral Device Type are set to 011b and 1FH (Unknown Device Type)).

RMB

Removable Medium Bit (RMB) of 1 indicates that the medium is removable. The drive only supports removable media, so this bit is always set to 1.

Device Type Modifier

The drive does not use this field currently, so this bit is set to 0.

ISO Version, ECMA Version and ANSI-Approved Version

The drive returns 2 for this field.

Response Data Format

The drive returns 2 for this field.

Additional Length

This field indicates the additional parameter length in bytes. This field always returns 31 (1FH).

The drive returns 9AH for the Byte 7:

| | |
|-----------------------|--|
| RelAdr | Relative Addressing bit of 1 indicate that the drive supports the relative addressing mode. |
| WBus32, WBus16 | Both Wide Bus 32 bit and Wide Bus 16 bit are 0 indicating that the drive only supports 8bit wide data transfers. |
| Sync | Synchronous Transfer bit of 1 indicates that the drive supports synchronous data transfer. |
| Linked | Linked Command bit of 1 indicates that the drive supports Linked command. |
| CmdQue | Command Queuing bit of 1 indicates that the drive supports tagged command queuing. |
| SftRe | Soft Reset bit of 0 indicates that the drive responds to RESET condition with hard RESET. |

Vendor Identification

The drive returns "**SONY**" for this field.

Product Identification

This field indicates the product ID. Following ASCII strings are returned for each model.

| <u>Model Number</u> | <u>Product Identification</u> |
|---------------------|-------------------------------|
| SMO-F561 | " SMO-F561 " |

Product Revision Level

This field returns the current firmware version in "**x.xx**" in ASCII.

MODE SELECT(6)**15H****FUNCTION**

MODE SELECT command sets the optical disk and drive parameters.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------|-------|-------|-------|----------|-------|-------|-------|
| 0 | Operation Code (15H) | | | | | | | |
| 1 | Logical Unit Number | | | PF | Reserved | | | SP |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Parameter List Length | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

PF

Page Format bit of 0 indicates that all the parameters after the Block Descriptors are vendor-specific. This bit of 1 indicates that the parameters following the Header and Block Descriptor(s) are structured as specified in following pages.

Even the Page Format bit is set to 0, the drive will operate as this bit is set to 1.

SP

Save Pages bit of 1 indicates that the drive performs the specified MODE SELECT operation and saves all the savable data to non-volatile storage. The data is saved only if it is different from those currently saved. Save Pages bit of 0 indicates that the drive performs the specified MODE SELECT operation and does not save any data.

Parameter List Length

This field specifies the length of the MODE SELECT Parameter List that the initiator will transfer to the drive during the DATA OUT phase in bytes. Parameter List Length of 0 indicates that no data will be transferred. This condition is not considered as an error.

MODE SELECT Parameter List contains a four-byte header, followed by zero or one Block Descriptor and Pages.

The format of MODE SELECT Parameter List is as follows:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | Mode Select Parameter Header | | | | | | | |
| 0 | Reserved | | | | | | | |
| 1 | Medium Type | | | | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Block Descriptor Length | | | | | | | |
| | Block Descriptor(s) | | | | | | | |
| 4 - m | Block Descriptor | | | | | | | |
| | Page(s) | | | | | | | |
| m - n | Page | | | | | | | |

Medium Type

Although the Medium Type field has to be set to 00H, 02H or 03H, the selection of the type will not have any effect on the operation.

Block Descriptor Length

Block Descriptor Length specifies the length of Block Descriptors in bytes. It shall be equal to the number of Block Descriptors times eight. Block Descriptor Length of 0 indicates that no Block Descriptor is included in the parameter list. This condition is not considered an error.

The form of Block Descriptor is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Density Code | | | | | | | |
| 1 | Number of Blocks (MSByte) | | | | | | | |
| 2 | Number of Blocks | | | | | | | |
| 3 | Number of Blocks (LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Block Length (MSByte) | | | | | | | |
| 6 | Block Length | | | | | | | |
| 7 | Block Length(LSByte) | | | | | | | |

All the fields in the Block Descriptor has no effect on the drive's operation.

Page format is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|--------------------------|-------|-----------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code | | | | | |
| 1 | Page Length | | | | | | | |
| 2 - n | Page Specific Parameters | | | | | | | |

The drive supports the Pages under the following definition:

| Page Code | Description |
|-----------|--------------------------------|
| 01H | Read-Write Error Recovery Page |
| 02H | Disconnect-Reconnect Page |
| 08H | Caching Page |
| 0AH | Control Mode Page |
| 0BH | Medium Types Supported Page |
| 20H | Vendor Unique Format Page |
| 21H | Vendor Unique Page |

01H Read-Write Error Recovery Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------|----------|-----------------|-------|----------|-------|-------|-------|
| 0 | Reserved | | Page Code (01H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | AWRE | Reserved | TB | RC | Reserved | PER | DTE | DCR |
| 3 | Read Retry Count | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Write Retry Count | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

AWRE

Automatic Write Reallocation Enable bit of 1 enables the automatic reallocation of defective sector(s) upon medium error detection during the following commands:

WRITE commands (0AH, 2AH, AAH)

ERASE commands (2CH, ACH)

WRITE AND VERIFY commands (2EH, AEH)

WRITE LONG commands (3FH)

This bit of 0 indicates that the automatic reallocation will not be enabled and the drive will return an error code upon defective sector detection.

Note:

AWRE cannot be disabled on Write-Once media.

TB

Transfer Block bit of 1 indicates that a data block which is not recovered within the specified recovery limits is transferred to the initiator before CHECK CONDITION status is returned. Transfer Block bit of 0 indicates that such a data block is not transferred to the initiator.

RC

Read Continuous bit of 1 indicates that the drive does not correct the error bytes by Error Correction Code and requests the drive to transfer the data without adding delay which would increase data integrity during the READ command. This bit being 0 allows the use of Error Correction Code.

PER

When Post Error bit is set to 1, the drive reports on recovered errors. This bit of 0 indicates there will be no reports on recovered errors.

DTE

Disable Transfer on Error bit of 1 indicates that the drive terminates the data phase upon detection of a recovered error. This bit of 0 indicates that the drive does not terminate the data phase upon detection of recovered error.

DCR

Disable Correction bit of 1 indicates that Error Correction Code is not used for data recovery. This bit of 0 allows the use of Error Correction Codes for data error recovery.

Read Retry Count

Read Retry Count field specifies how many times the drive retries the READ operation before it reports an error to the initiator.

Write Retry Count

Write Retry Count field specifies how many times the drive retries the WRITE operation before it reports an error to the initiator.

02H Disconnect-Reconnect Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-----------------------------|-------|-----------------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code (02H) | | | | | |
| 1 | Page Length (0EH) | | | | | | | |
| 2 | Buffer Full Ratio | | | | | | | |
| 3 | Buffer Empty Ratio | | | | | | | |
| 4-9 | Reserved | | | | | | | |
| 10 | Maximum Burst Size (MSByte) | | | | | | | |
| 11 | Maximum Burst Size (LSByte) | | | | | | | |
| 12-15 | Reserved | | | | | | | |

Disconnect-Reconnect page provides requests the initiator to tune the performance of the SCSI bus.

Buffer Full Ratio, Buffer Empty Ratio

Buffer Full Ratio and Buffer Empty Ratio field indicate how much buffer space should be available prior to attempting a reselection. Targets which do not support the requested ratio will round the number to the implemented ratio.

These fields have no effect on the drive.

Maximum Burst Size

This field indicates the maximum amount of data that the drive transfers during the data phase before disconnecting which the initiator has granted. This field shall be expressed in increments of 512 bytes. (e.g. one means 512 bytes, two means 1024 bytes, and so on.) Field value of zero indicates that there is no limit on the amount of data to be transferred per connection.

08H Caching Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|-----------------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code (08H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | Reserved | | | | WCE | MF | RCD | |
| 3 | Reserved | | | | | | | |
| 4 | Disable Pre-Fetch Transfer Length (MSByte) | | | | | | | |
| 5 | Disable Pre-Fetch Transfer Length (LSByte) | | | | | | | |
| 6 | Minimum Pre-Fetch (MSByte) | | | | | | | |
| 7 | Minimum Pre-Fetch (LSByte) | | | | | | | |
| 8 | Maximum Pre-Fetch (MSByte) | | | | | | | |
| 9 | Maximum Pre-Fetch (LSByte) | | | | | | | |
| 10 | Maximum Pre-Fetch Ceiling (MSByte) | | | | | | | |
| 11 | Maximum Pre-Fetch Ceiling (LSByte) | | | | | | | |

WCE

Write Cache Enable bit of 1 indicates that the write cache is enabled. Otherwise, this bit being 0 means the write cache is disabled. This bit has the priority over the functional switch setting when the MODE SELECT command is requested.

RCD

Read Cache Disable bit of 1 indicates that the read cache is disabled. Otherwise, this bit being 0 means the read cache is enabled.

The operation of Write Cache Enable (WCE) Bit and Read Cache Disable (RCD) Bit is as follows:

| WCE | RCD | write cache | read cache |
|-------------|-------------|-------------|------------|
| 0 | 0 | disable | enable |
| 1 (default) | 0 (default) | enable | enable |
| 0 | 1 | disable | disable |

If both WCE and RCD bits are set to 1, WCE bit will be automatically changed to 0.

MODE SELECT(6) (15H)

The following five fields exist for compatibility and do not have any means of the operation of the drive:

MF

Pre-Fetch Transfer Length

Minimum Pre-Fetch

Maximum Pre-Fetch

Maximum Pre-fetch Ceiling

0AH Control Mode Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-----------------|-------|----------|-------|----------|-------|
| 0 | Reserved | | Page Code (0AH) | | | | | |
| 1 | Page Length (06H) | | | | | | | |
| 2 | Queue Algorithm Modifier | | | | Reserved | | | |
| 3 | Reserved | | | | | | Qerr (0) | Dque |
| 4-7 | Reserved | | | | | | | |

Queue Algorithm Modifier

Queue Algorithm Modifier field specifies restrictions on the algorithm used for reordering commands that are tagged with the SIMPLE QUEUE TAG message. Queue Algorithm Modifier field is as follows:

| Value | Definition |
|---------|---------------------------------|
| 0h | Restricted reordering |
| 1h | Unrestricted reordering allowed |
| 2h ~ Fh | Reserved |

A value of 0 in this field specifies that the drive shall order the actual execution sequence of the commands with the SIMPLE QUEUE TAG such that data integrity is maintained for the initiator. A value of 1 specifies that the drive may order the actual execution sequence of the commands with the SIMPLE QUEUE TAG in any manner.

Qerr

Queue Error management bit of 0 indicates that remaining suspended I/O process shall resume after the contingent allegiance condition.

The default value of this bit is 0 and cannot be changed.

Dque

Disable Queuing bit of 0 indicates that the tagged command queuing is enabled. This bit of 1 indicates that the tagged command queuing is disabled.

0BH Medium Type Supported Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------|-------|-----------------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code (0BH) | | | | | |
| 1 | Page Length (06H) | | | | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Medium Type 1 Supported | | | | | | | |
| 5 | Medium Type 2 Supported | | | | | | | |
| 6 | Medium Type 3 Supported | | | | | | | |
| 7 | Medium Type 4 Supported | | | | | | | |

This page sets the supported medium type(s). The medium type supported by the drive is indicated from Medium Type 1 Supported field to Medium Type 4 Supported field. The drive accepts the following combination:

| Byte | Field Name | Setting 1 | Setting 2 (default) | Setting 3 | Setting 4 |
|------|-------------------------|-----------|---------------------|-----------|-----------|
| 4 | Medium Type 1 Supported | 00H | 02H | 02H | 03H |
| 5 | Medium Type 2 Supported | 00H | 03H | 00H | 00H |
| 6 | Medium Type 3 Supported | 00H | 00H | 00H | 00H |
| 7 | Medium Type 4 Supported | 00H | 00H | 00H | 00H |

- 00H Default (only one medium type supported.)
- 02H Write-Once medium
- 03H Rewritable medium

Only rewritable medium can be used at settings 1 and 4. Both rewritable and Write-Once medium can be used at setting 2 (default). Only Write-Once medium can be used at setting 3.

20H Vendor Unique Format Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-----------------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code (20H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | Format Mode | | | | | | | |
| 3-11 | Format Type Specific Data | | | | | | | |

The drive supports the Format Mode 03H and 04H. Format Mode 03H is for 650 Mbyte/cartridge medium, and Format Mode 04H is for 1.2/1.3, 2.3/2.6, 4.1/4.8/5.2 and 8.6/9.1((4096 byte/sector) Gbyte/cartridge medium. Format Mode 05H is for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium.

Format Mode 03H

Format Mode 03H supports two types of format (type 0 and type 1 by setting Byte 3).

Format Mode 03H - Type 0

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (03H) | | | | | | | |
| 3 | Type (00H) | | | | | | | |
| 4 | Size of User Band (MSByte) | | | | | | | |
| 5 | Size of User Band | | | | | | | |
| 6 | Size of User Band | | | | | | | |
| 7 | Size of User Band (LSByte) | | | | | | | |
| 8 | Size of Spare Band (MSByte) | | | | | | | |
| 9 | Size of Spare Band (LSByte) | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

Size of User Band

This field indicates the length of each user band in number of logical blocks.

Size of Spare Band

This field indicates the length of each spare band in number of logical blocks.

Number of Bands

This field indicates the number of bands on the media. The drive can READ and WRITE multi-bands formatted medium. (For 650 Mbyte media, the drive can only READ.)

Format Mode 03H - Type 1

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (03H) | | | | | | | |
| 3 | Type (01H) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Number of Bands (MSByte) | | | | | | | |
| 7 | Number of Bands (LSByte) | | | | | | | |
| 8 | Size of Spare Band (MSByte) | | | | | | | |
| 9 | Size of Spare Band (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

Type 1 format exists for compatibility.

Format Mode 04H

Format Mode 04H is for 1.3 and 2.6 Gbytes/cartridge medium.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (04H) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

Format Mode 05H

Format Mode 05H is for 9.1 Gbytes/cartridge 512 and 1024 byte/sector medium.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (05H) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Logical Block Start Offset | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

For each type of media, the number of Bands field shall be as shown in table.

| Gbyte/cartridge | The number of Bands field |
|-----------------|---------------------------|
| 1.2/1.3GB | 1(01H) or 16(10H) |
| 2.3GB | 30(1EH) |
| 2.6GB | 34(22H) |
| 4.1GB | 38(26H) |
| 4.8GB | 45(2DH) |
| 5.2GB | 24(18H) |
| 8.6GB | 30(1EH) |
| 9.1GB | 16(10H) |

21H Vendor Unique Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------|---------------------|-----------------|-----------------|--------|----------|--------|--------|
| 0 | Reserved | | Page Code (21H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | Reserved | | | | | | | DAIR |
| 3 | DWR | Quick Disconnect | Reserved | Force Verify | DRBCHK | Reserved | | |
| 4 | S1 - 8 | S1 - 7 | S1 - 6 | S1 - 5 | S1 - 4 | S1 - 3 | S1 - 2 | S1 - 1 |
| 5 | S2 - 8 | S2 - 7 | S2 - 6 | S2 - 5 | S2 - 4 | S2 - 3 | S2 - 2 | S2 - 1 |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

DAIR

Direct Access Inquiry Response bit of 1 indicates the Peripheral Device Type field in the Inquiry Data indicates "Direct Access Device." Direct Access Inquiry Response bit of 0 indicates the Peripheral Device Type field indicates "Optical Memory Device."

DWR

Disable Write Reordering bit of 1 indicates write reordering is disabled. Disable Write Reordering bit of 0 indicates write reordering is enabled.

Quick Disconnect

Quick Disconnect bit of 1 enables SCSI bus disconnection before command validation on media access commands (i.e. read, write). This bit of 0 disables SCSI bus disconnection before command validation on media access commands.

Force Verify


Force Verify bit of 1 indicates that all write operations will be verified. Write 6, 10 and 12-byte commands will operate as if they are Write Verify 6, 10 and 12-byte commands. This bit of 0 indicates normal operations.

DRBCHK

Disable Read Blank Check bit of 1 indicates that there will be no blank check following a Read Error, and vice versa. For CCW media, the drive will perform a blank check no matter what this bit is set to.

SX - Y

These bits represent the DIP switch "S50X - Y." They are only meaningful on MODE SENSE command. Although these bits may set to any number, they will have no effect on the drive.

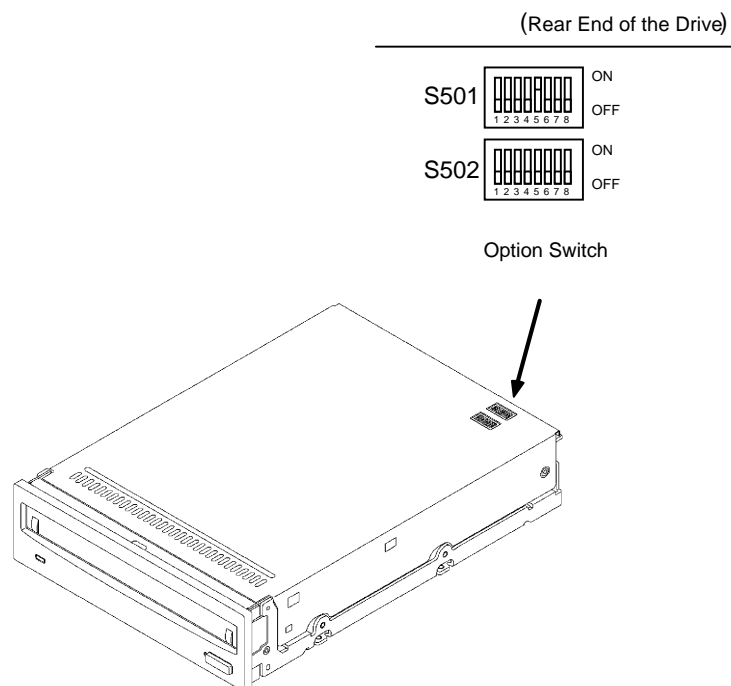

2AH Vendor Unique Emulation Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------|------------------|-----------------|--------------|--------|----------|--------|--------|
| 0 | Reserved | Reserved | Page Code (21H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | Reserved | | | | | | | DAIR |
| 3 | DWR | Quick Disconnect | Reserved | Force Verify | DRBCHK | Reserved | | |
| 4 | S1 - 8 | S1 - 7 | S1 - 6 | S1 - 5 | S1 - 4 | S1 - 3 | S1 - 2 | S1 - 1 |
| 5 | S2 - 8 | S2 - 7 | S2 - 6 | S2 - 5 | S2 - 4 | S2 - 3 | S2 - 2 | S2 - 1 |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |

PES

Permit Erase bit of 1 indicates that ERASE command is permitted for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium.

This bit of 0 indicates that ERASE command is inhibited for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium.

RMWV

Read Modify Write Verify bit of 1 indicates that the drive always perform verify operation for sector updated by read modify write.

This bit of 0 indicates that the drive does not always perform verify operation for sectors updated by read modify write.

FV

Force Verify bit of 1 indicates that all write operations for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium will be verified.

This bit of 0 indicates normal operations.

Default Values of Mode Page Parameters

| Page | Field | Default Value |
|------|-----------------------------------|---------------|
| 01H | AWRE | 1 |
| 01H | TB | 0 |
| 01H | RC | 0 |
| 01H | PER | 0 |
| 01H | DTE | 0 |
| 01H | DCR | 0 |
| 01H | Read Retry Count | 05H |
| 01H | Write Retry Count | 05H |
| 02H | Buffer Empty Ratio | 20H |
| 02H | Buffer Full Ratio | 20H |
| 02H | Maximum Burst Size | 0000H |
| 08H | WCE | 1 |
| 08H | MF | 1 |
| 08H | RCD | 0 |
| 08H | Disable Pre-fetch Transfer Length | 40H |
| 08H | Minimum Pre-fetch | 01H |
| 08H | Maximum Pre-fetch | 01H |
| 08H | Maximum Pre-fetch Ceiling | 40H |
| 0AH | Queue Algorithm Modifier | 0 |
| 0AH | QErr | 0 |
| 0AH | DQue | 0 |
| 0BH | Medium Type 1 Supported | 02H |
| 0BH | Medium Type 2 Supported | 03H |
| 0BH | Medium Type 3 Supported | 00H |
| 0BH | Medium Type 4 Supported | 00H |
| 21H | DAIR | 0 |
| 21H | DWR | 0 |
| 21H | Quick Disconnect | 0 |
| 21H | Force Verify | 0 |
| 21H | DRBCHK | 0 |
| 2AH | PES | 0 |
| 2AH | RMWV | 1 |
| 2AH | FV | 1 |

These values are set as current values when Power-On reset, SCSI bus reset occurs or BUS DEVICE RESET message is received.

Default values and current values of format page (20H) are set upon reset of media loading as follows:

650 Mbyte/cartridge media:

| Page | Field | Default Value | Current Value |
|-----------------------|--------------------|---------------|---------------|
| 20H | Format Mode | 3 | 3 |
| | Type | 0 | 0 |
| (Non-formatted media) | Number of Bands | 1 | 1 |
| | Size of Spare Band | 2048 | 2048 |
| (Formatted media) | Number of Bands | 1 | - |
| | Size of Spare Band | 2048 | - |

(For formatted media) Number of Bands and Size of Spare Band previously set upon formatting will be set as current values. Only when the media is unformatted, these current values will be set as the default setting.

1.2/1.3 Gbyte/cartridge (512/1024 byte/sector) media:

| Page | Field | Default Value | Current Value |
|-----------------------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| (Non-formatted media) | Number of Bands | 1 | 1 |
| (Formatted media) | Number of Bands | 1 | 1 or 16 |

(For formatted media) Number of Bands previously set upon formatting (either 1 or 16) will be set as current value. Only when the media is unformatted, these current values will be set as the default setting.

2.3 Gbytes/cartridge (512 bytes/sector) media:

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 30 | 30 |

2.6 Gbytes/cartridge (1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 34 | 34 |

4.1 Gbytes/cartridge (512 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 38 | 38 |

4.8 Gbytes/cartridge (1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 45 | 45 |

5.2 Gbytes/cartridge (2048 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 24 | 24 |

8.6 Gbytes/cartridge (2048 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 30 | 30 |

9.1 Gbytes/cartridge (4096 bytes/sector) media

| Page | Field | Default Value | Current Value |
|-------------|-----------------|----------------------|----------------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 16 | 16 |

9.1 Gbytes/cartridge (512 and 1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|-------------|----------------------------|----------------------|----------------------|
| 20H | Format Mode | 5 | 5 |
| | Logical Block Start Offset | 0 | 0 |
| | Number of Bands | 16 | 16 |

RESERVE

16H

FUNCTION

Gains the priority to control the drive when the drive is connected to multiple initiators.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|--------|-----------------------|-------|-------|----------|
| 0 | Operation Code (16H) | | | | | | | |
| 1 | Logical Unit Number | | | 3rdPty | Third Party Device ID | | | Reserved |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

The reservation is effective until one of the following occurs:

1. The reserved initiator sends another valid RESERVE command.
2. The reserved initiator is released by a RELEASE command.
3. Any initiator sends a BUS DEVICE RESET message.
4. RESET condition occurs.

If any other initiator attempts to perform any command on the reserved logical unit other than INQUIRY REQUEST SENSE, and PREVENT/ALLOW MEDIUM REMOVAL (with a prevent bit of zero), or RELEASE command then the command shall be rejected with RESERVATION CONFLICT status.

3rdPty

Third Party bit of 1 indicates that the drive is reserved for the SCSI device specified in the Third Party Device ID field. Third Party bit of 0 indicates that a third party reservation is not requested.

Third Party Device ID

This field specifies the device ID for the third party reservation.

RELEASE**17H****FUNCTION**

RELEASE command is sent by the reserving initiator to release the drive for a use by another initiator.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|--------|-----------------------|-------|-------|----------|
| 0 | Operation Code (17H) | | | | | | | |
| 1 | Logical Unit Number | | | 3rdPty | Third Party Device ID | | | Reserved |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

3rdPty

Third Party bit of 1 indicates that the drive is to be released only by the initiator which reserved the drive using the third party reservation prior to this RELEASE option. This bit being 0 indicates that the Third Party Release is not requested.

Third Party Device ID

This field specifies the device ID for the third party release.

MODE SENSE(6)**1AH****FUNCTION**

Acquires the parameters of medium, drive and drive controller.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-----------|-------|----------|-------|-------|-------|
| 0 | Operation Code (1AH) | | | | | | | |
| 1 | Logical Unit Number | | Reserved | DBD | Reserved | | | |
| 2 | PC | | Page Code | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Allocation Length | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

DBD

Disable Block Descriptors bit of 1 indicates that the Block Descriptor is not provided. On the other hand, this bit being 0 indicates that the Block Descriptor is provided.

PC

Page Control field defines the type of parameter values to be returned as follows:

| bit 7 | bit 6 | type of parameter values |
|-------|-------|--------------------------|
| 0 | 0 | Current Values |
| 0 | 1 | Changeable Values |
| 1 | 0 | Default Values |
| 1 | 1 | Saved Values |

Page Code

Page Code values are the same as for Mode Select command. If 00H or 3FH is specified, all the pages are returned.

Allocation Length

This field specifies the number of bytes that the initiator has allocated for the return of this data. Allocation Length bit of 0 indicates that there will be no returning data. This condition is not considered as an error. The drive will terminate the data-in-phase either when the Allocation Length has been transferred or when all the available data has been transferred to the initiator, whichever with less length.

The format of the MODE SENSE data is as follows:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0-3 | MODE SENSE Parameter Header | | | | | | | |
| 0-7 | Block Descriptor (if any) | | | | | | | |
| 0-n | Page(s) | | | | | | | |

The MODE SENSE Parameter Header is defined in following table.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------|----------|-------|--------|----------|-------|-------|-------|
| 0 | Mode Data Length | | | | | | | |
| 1 | Medium Type | | | | | | | |
| 2 | WP | Reserved | | DPOFUA | Reserved | | | |
| 3 | Block Descriptor Length | | | | | | | |

Mode Data Length

This field specifies the length of the following MODE SENSE data in bytes.

Medium Type

Medium Type field will return 00H (default: only one medium type to be supported), 02H (Write-Once medium), or 03H (rewritable medium) depending on the drive condition. It will return 00H for no disk or not ready condition and 02H or 03H if it is ready to access the medium. Medium Type field always return 00H if Medium Type 1 Supported to Medium Type 4 Supported field of Page 0BH is all set to 00H.

WP

Write Protect bit of 1 indicates that the optical disk in the drive is write protected. This bit of 0 indicates the disk is not write protected.

DPOFUA

This bit indicates DPO/FUA (DPO: Disable Page Out, FUA: Force Unit Access) is supported or not. This bit being 1 indicates DPO/FUA flag is supported. This bit being 0 indicates DPO/FUA is not supported. This bit is fixed to be 1.

Block Descriptor Length

Block Descriptor Length field specifies the length of the Block Descriptor in bytes. This field returns eight when DBD bit is 0. Otherwise, this field returns zero.

The format of Block Descriptor is show in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Density Code | | | | | | | |
| 1 | Number of Blocks (MSByte) | | | | | | | |
| 2 | Number of Blocks | | | | | | | |
| 3 | Number of Blocks (LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Block Length (MSByte) | | | | | | | |
| 6 | Block Length | | | | | | | |
| 7 | Block Length (LSByte) | | | | | | | |

Density Code

Density Code field will return the following code depending on the inserted media:

| Density Code | Media Type |
|--------------|-------------------------------|
| 03H | 600, 650 Mbyte/cartridge |
| 0AH | 1.2, 1.3 Gbyte/cartridge |
| 00H | 2.3, 2.6 Gbyte/cartridge |
| 00H | 4.1, 4.8, 5.2 Gbyte/cartridge |
| 00H | 8.6, 9.1 Gbyte/cartridge |

Number of Blocks

This field specifies the number of logical blocks on the medium.

Block Length

This field specifies the length of each logical block in bytes.

01H Read-Write Error Recovery Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|-------------------|----------|-----------------|-------|----------|-------|-------|-------|----|----|
| 0 | PS (1) | Reserved | Page Code (01H) | | | | | | na | na |
| 1 | Page Length (0AH) | | | | | | | | na | na |
| 2 | AWRE | Reserved | TB | RC | Reserved | PER | DTE | DCR | B7 | 80 |
| 3 | Read Retry Count | | | | | | | | FF | 05 |
| 4 | Reserved | | | | | | | | 00 | 00 |
| 5 | Reserved | | | | | | | | 00 | 00 |
| 6 | Reserved | | | | | | | | 00 | 00 |
| 7 | Reserved | | | | | | | | 00 | 00 |
| 8 | Write Retry Count | | | | | | | | FF | 05 |
| 9 | Reserved | | | | | | | | 00 | 00 |
| 10 | Reserved | | | | | | | | 00 | 00 |
| 11 | Reserved | | | | | | | | 00 | 00 |

Changeable or default field values are returned to the host upon the request indicated by the PC field of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

AWRE

Automatic Write Reallocation Enable bit of 1 indicates that the automatic reallocation of defective sector(s) upon medium error detection are enabled during the following commands:

WRITE commands (0AH, 2AH, AAH)

ERASE commands (2CH, ACH)

WRITE AND VERIFY commands (2EH, AEH)

WRITE LONG commands (3FH, DFH)

This bit of 0 indicates that the automatic reallocation is not enabled and the drive will return an error code upon defective sector detection.

Note:

AWRE is not disabled on Write-Once media.

TB

Transfer Block bit of 1 indicates that a data block which is not recovered within the specified

recovery limits is transferred to the initiator before CHECK CONDITION status is returned. Transfer Block bit of 0 indicates that such a data block is not transferred to the initiator.

RC

Read Continuous bit of 1 indicates that the drive does not correct the error bytes by Error Correction Code and requests the drive to transfer the data without adding delay which would increase data integrity during the READ command. This bit being 0 indicates that the drive is allowed to use the Error Correction Code.

PER

When Post Error bit returns 1, the drive reports on recovered errors. This bit of 0 indicates there will be no reports on recovered errors.

DTE

Disable Transfer on Error bit of 1 indicates that the drive terminates the data phase upon detection of a recovered error. This bit of 0 indicates that the drive does not terminate the data phase upon detection of recovered error.

DCR

Disable Correction bit of 1 indicates that Error Correction Code is not used for data recovery. This bit of 0 means the drive is allowed to use the Error Correction Codes for data error recovery.

Read Retry Count

Read Retry Count field specifies how many times the drive retries the READ operation before it reports an error to the initiator.

Write Retry Count

Write Retry Count field specifies how many times the drive retries the WRITE operation before it reports an error to the initiator.

02H Disconnect-Reconnect Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|-------|-----------------------------|----------|-----------------|-------|-------|-------|-------|-------|----|----|
| 0 | PS (1) | Reserved | Page Code (02H) | | | | | | na | na |
| 1 | Page Length (0EH) | | | | | | | | na | na |
| 2 | Buffer Full Ratio | | | | | | | | FF | 20 |
| 3 | Buffer Empty Ratio | | | | | | | | FF | 20 |
| 4-9 | Reserved | | | | | | | | 00 | 00 |
| 10 | Maximum Burst Size (MSByte) | | | | | | | | FF | 00 |
| 11 | Maximum Burst Size (LSByte) | | | | | | | | FF | 20 |
| 12-15 | Reserved | | | | | | | | 00 | 00 |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

Disconnect-Reconnect page provides requests the initiator to tune the performance of the SCSI bus.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

Buffer Full Ratio and Buffer Empty Ratio

The Buffer Full Ratio and Buffer Empty Ratio field indicate how much buffer space should be available prior to attempting a reselection. Targets which do not support the requested ratio will round the number to the implemented ratio. These fields have no effect on the drive.

Maximum Burst Size

This field indicates the maximum amount of data that the drive transfers during the data phase before disconnecting which the initiator has granted. This field is expressed in increments of 512 bytes. (e.g. one means 512 bytes, two means 1024 bytes, and so on.) Field value of zero indicates that there is no limit on the amount of data to be transferred per connection.

08H Caching Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|--|----------|-----------------|-------|-------|-------|-------|-------|----|----|
| 0 | PS (1) | Reserved | Page Code (08H) | | | | | | na | na |
| 1 | Page Length (0AH) | | | | | | | | na | na |
| 2 | Reserved | | | | WCE | MF | RCD | | 07 | 06 |
| 3 | Reserved | | | | | | | | 00 | 00 |
| 4 | Disable Pre-Fetch Transfer Length (MSByte) | | | | | | | | FF | 00 |
| 5 | Disable Pre-Fetch Transfer Length (LSByte) | | | | | | | | FF | 40 |
| 6 | Minimum Pre-Fetch (MSByte) | | | | | | | | FF | 00 |
| 7 | Minimum Pre-Fetch (LSByte) | | | | | | | | FF | 01 |
| 8 | Maximum Pre-Fetch (MSByte) | | | | | | | | FF | 00 |
| 9 | Maximum Pre-Fetch (LSByte) | | | | | | | | FF | 01 |
| 10 | Maximum Pre-Fetch Ceiling (MSByte) | | | | | | | | FF | 00 |
| 11 | Maximum Pre-Fetch Ceiling (LSByte) | | | | | | | | FF | 40 |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

WCE

Write Cache Enable bit of 1 indicates that the write cache is enabled. This bit being 0 means the write cache is disabled. This bit has the priority over the functional switch setting when the MODE SELECT command is requested.

RCD

Read Cache Disable bit of 1 indicates that the read cache is disabled. This bit being 0 means the read cache is enabled.

The operation of Write Cache Enable (WCE) Bit and Read Cache Disable (RCD) Bit is as follows:

| WCE | RCD | write cache | read cache |
|-------------|-------------|--------------------|-------------------|
| 0 | 0 | disable | enable |
| 1 (default) | 0 (default) | enable | enable |
| 0 | 1 | disable | disable |

If both WCE and RCD bits are set to 1, WCE bit will be automatically changed to 0.

The following five fields exist for compatibility and do not have any means of the operation of the drive:

MF

Pre-Fetch Transfer Length

Minimum Pre-Fetch

Maximum Pre-Fetch

Maximum Pre-fetch Ceiling

0AH Control Mode Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|--------------------------|----------|-----------------|-------|----------|----------|-------|-------|----|----|
| 0 | PS(1) | Reserved | Page Code (0AH) | | | | | | na | na |
| 1 | Page Length (06H) | | | | | | | | na | na |
| 2 | Queue Algorithm Modifier | | | | Reserved | | | | 00 | 00 |
| 3 | Reserved | | | | | QErr (0) | DQue | 01 | 00 | |
| 4-7 | Reserved | | | | | | | | 00 | 00 |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

Queue Algorithm Modifier

Queue Algorithm Modifier field specifies restrictions on the algorithm used for reordering commands that are tagged with the SIMPLE QUEUE TAG message. Queue Algorithm Modifier field is as follows:

| Value | Definition |
|---------|---------------------------------|
| 0h | Restricted reordering |
| 1h | Unrestricted reordering allowed |
| 2h ~ Fh | Reserved |

A value of 0 in this field specifies that the drive shall order the actual execution sequence of the commands with the SIMPLE QUEUE TAG such that data integrity is maintained for the initiator.

A value of 1 specifies that the drive may order the actual execution sequence of the commands with the SIMPLE QUEUE TAG in any manner.

QErr

Queue Error management bit of 0 will be returned indicating that remaining suspended I/O process shall resume after the contingent allegiance condition.

DQue

Disable Queuing bit of 0 indicates that the tagged command queuing is enabled. This bit of 1 indicates that the tagged command queuing is disabled.

0BH Medium Type Supported Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|-------------------------|----------|-----------------|-------|-------|-------|-------|-------|----|----|
| 0 | PS (1) | Reserved | Page Code (0BH) | | | | | | na | na |
| 1 | Page Length (06H) | | | | | | | | na | na |
| 2 | Reserved | | | | | | | | 00 | 00 |
| 3 | Reserved | | | | | | | | 00 | 00 |
| 4 | Medium Type 1 Supported | | | | | | | | FF | 02 |
| 5 | Medium Type 2 Supported | | | | | | | | FF | 03 |
| 6 | Medium Type 3 Supported | | | | | | | | FF | 00 |
| 7 | Medium Type 4 Supported | | | | | | | | FF | 00 |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

This page sets the supported medium type(s). The medium type supported by the drive is indicated from Medium Type 1 Supported field to Medium Type 4 Supported field. The drive shall return one of the following combination:

| Byte | Field Name | Setting 1 | Setting 2 (default) | Setting 3 | Setting 4 |
|------|-------------------------|-----------|------------------------|-----------|-----------|
| 4 | Medium Type 1 Supported | 00H | 02H | 02H | 03H |
| 5 | Medium Type 2 Supported | 00H | 03H | 00H | 00H |
| 6 | Medium Type 3 Supported | 00H | 00H | 00H | 00H |
| 7 | Medium Type 4 Supported | 00H | 00H | 00H | 00H |

00H Default (only one medium type supported.)

02H Write-Once medium

03H Rewritable medium

Only rewritable medium will be used at settings 1 and 4. Both rewritable and Write-Once medium will be used at setting 2 (default). Only Write-Once medium will be used at setting 3.

20H Vendor Unique Format Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|---------------------------|----------|-----------------|-------|-------|-------|-------|-------|----|----|
| 0 | PS (1) | Reserved | Page Code (20H) | | | | | | na | na |
| 1 | Page Length (0AH) | | | | | | | | na | na |
| 2 | Format Mode | | | | | | | | FF | - |
| 3-11 | Format Type Specific Data | | | | | | | | FF | - |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is saved on the media upon formatting.

Format Mode 03H is for 650 Mbytes/cartridge medium, and Format Mode 04H is for 1.2/1.3, 2.3/2.6, 4.1/4.8/5.2 and 8.6/9.1 (4096byte/sector) Gbytes/cartridge medium. Format Mode 05H is for 9.1 Gbyte/cartridge 512 and 1024 byte/sector.

Format Mode 03H

Format Mode 03H supports two types of format (type 0 and type 1 set by Byte 3).

Format Mode 03H - Type 0

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (03H) | | | | | | | |
| 3 | Type (00H) | | | | | | | |
| 4 | Size of User Band (MSByte) | | | | | | | |
| 5 | Size of User Band | | | | | | | |
| 6 | Size of User Band | | | | | | | |
| 7 | Size of User Band (LSByte) | | | | | | | |
| 8 | Size of Spare Band (MSByte) | | | | | | | |
| 9 | Size of Spare Band (LSByte) | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

Size of User Band

This field indicates the length of each user band in number of blocks. The default value for 512 kByte/sector media is 576999. And the default value for 1024 kByte/sector is 314569.

Size of Spare Band

This field indicates the length of each spare band in number of blocks.

Number of Bands

This field indicates the number of bands on the media.

Format Mode 03H - Type 1

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (03H) | | | | | | | |
| 3 | Type (01H) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Number of Bands (MSByte) | | | | | | | |
| 7 | Number of Bands (LSByte) | | | | | | | |
| 8 | Size of Spare Band (MSByte) | | | | | | | |
| 9 | Size of Spare Band (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

Type 1 format exists for compatibility.

Format Mode 04H

Format Mode 04H is for 1.2/1.3, 2.3/2.6, 4.1/4.8/5.2 and 8.6/9.1 (4096 byte/sector) Gbytes/cartridge medium.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (04H) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

For 1.2/1.3 Gbyte media, the number of Bands field will return either 1(01H), 16(10H). This field will return 30(1EH) for 2.3 Gbyte media (512 byte/sector) and 34(22H) for 2.6 Gbyte media (1024 byte /sector). And this field will return 38(26H) for 4.1 Gbyte media (512 byte/sector), 45(20H) for 4.8 Gbyte media (1024 byte/sector) and 24(18H) for 5.2 Gbyte media (2048 byte/sector), 30(1EH) for 8.6 Gbyte media (2048 byte/sector) and 16(10H) for 9.1 Gbyte media (4096 byte/sector).

Format Mode 05H

Format Mode 05H is for 9.1 Gbytes/cartridge 512 and 1024 byte/sector medium.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| 2 | Format Mode (05H) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Logical Block Start Offset | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Number of Bands (MSByte) | | | | | | | |
| 11 | Number of Bands (LSByte) | | | | | | | |

Default values and current values of format page (20H) are set upon reset or media loading as follows:

650 Mbyte/cartridge media:

| Page | Field | Default Value | Current Value |
|-----------------------|--------------------|---------------|---------------|
| 20H | Format Mode | 3 | 3 |
| (Non-formatted media) | Type | 0 | 0 |
| | Number of Bands | 1 | 1 |
| (Formatted media) | Size of Spare Band | 2048 | 2048 |
| | Number of Bands | 1 | - |
| | Size of Spare Band | 2048 | - |

(For formatted media) Number of Bands and Size of Spare Band previously set upon formatting will be set as current values. Only when the media is unformatted, these current values will be set as the default setting.

1.2/1.3 Gbyte/cartridge (512/1024 byte/sector) media:

| Page | Field | Default Value | Current Value |
|-----------------------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| (Non-formatted media) | Number of Bands | 1 | 1 |
| (Formatted media) | Number of Bands | 1 | 1 or 16 |

(For formatted media) Number of Bands previously set upon formatting (either 1 or 16) will be set

as current value. Only when the media is unformatted, these current values will be set as the default setting.

2.3 Gbytes/cartridge (512 bytes/sector) media:

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 30 | 30 |

2.6 Gbytes/cartridge (1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 34 | 34 |

4.1 Gbytes/cartridge (512 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 38 | 38 |

4.8 Gbytes/cartridge (1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 45 | 45 |

5.2 Gbytes/cartridge (2048 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 24 | 24 |

8.6 Gbytes/cartridge (2048 bytes/sector) media

| Page | Field | Default Value | Current Value |
|------|-----------------|---------------|---------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 30 | 30 |

9.1 Gbytes/cartridge (4096 bytes/sector) media

| Page | Field | Default Value | Current Value |
|-------------|-----------------|----------------------|----------------------|
| 20H | Format Mode | 4 | 4 |
| | Number of Bands | 16 | 16 |

9.1 Gbytes/cartridge (512, 1024 bytes/sector) media

| Page | Field | Default Value | Current Value |
|-------------|----------------------------|----------------------|----------------------|
| 20H | Format Mode | 5 | 5 |
| | Logical Block Start Offset | 0 | 0 |
| | Number of Bands | 16 | 16 |

21H Vendor Unique Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | C | D |
|------|-------------------|------------------|-----------------|--------------|--------|----------|--------|--------|----|----|
| 0 | PS (1) | Reserved | Page Code (21H) | | | | | | na | na |
| 1 | Page Length (0AH) | | | | | | | | na | na |
| 2 | Reserved | | | | | | | DAIR | 01 | 00 |
| 3 | DWR | Quick Disconnect | Reserved | Force Verify | DRBCHK | Reserved | | | D8 | 00 |
| 4 | S1 - 8 | S1 - 7 | S1 - 6 | S1 - 5 | S1 - 4 | S1 - 3 | S1 - 2 | S1 - 1 | FF | 00 |
| 5 | S2 - 8 | S2 - 7 | S2 - 6 | S2 - 5 | S2 - 4 | S2 - 3 | S2 - 2 | S2 - 1 | FF | 00 |
| 6 | Reserved | | | | | | | | 00 | 00 |
| 7 | Reserved | | | | | | | | 00 | 00 |
| 8 | Reserved | | | | | | | | 00 | 00 |
| 9 | Reserved | | | | | | | | 00 | 00 |
| 10 | Reserved | | | | | | | | 00 | 00 |
| 11 | Reserved | | | | | | | | 00 | 00 |

Changeable or default field values are returned to the host upon the request indicated by the PC bit of CDB. In the above page table, column C indicates changeable values and column D indicates default values of each byte.

PS

Parameter Savable bit of 1 will be returned indicating this parameter page is savable in non-volatile RAM.

DAIR

Direct Access Inquiry Response bit of 1 indicates the Peripheral Device Type field in the Inquiry Data indicates "Direct Access Device." Direct Access Inquiry Response bit of 0 indicates the Peripheral Device Type field indicates "Optical Memory Device."

DWR

Disable Write Reordering bit of 1 indicates write reordering is disabled. Disable Write Reordering bit of 0 indicates write reordering is enabled.

Quick Disconnect

Quick Disconnect bit of 1 enables SCSI bus disconnection before command validation on media access commands (i.e. read, write). This bit of 0 disables SCSI bus disconnection before command validation on media access commands.

Force Verify


Force Verify bit of 1 indicates that all write operations will be verified. Write 6, 10 and 12-byte commands will operate as if they are Write Verify 6, 10 and 12-byte commands. This bit of 0 indicates normal operations.

DRBCHK

Disable Read Blank Check bit of 1 indicates that there will be no blank check following a Read Error. This bit of 0 indicates that there will be a blank check after a Read Error. For CCW media, the drive will perform a blank check no matter what this bit is set to.

SX - Y

This notation represents DIP switch "S50X - Y." The bit reflects the condition of each switch. If the switch is on, the bit will return 1. And if the switch is off, the bit will return 0.

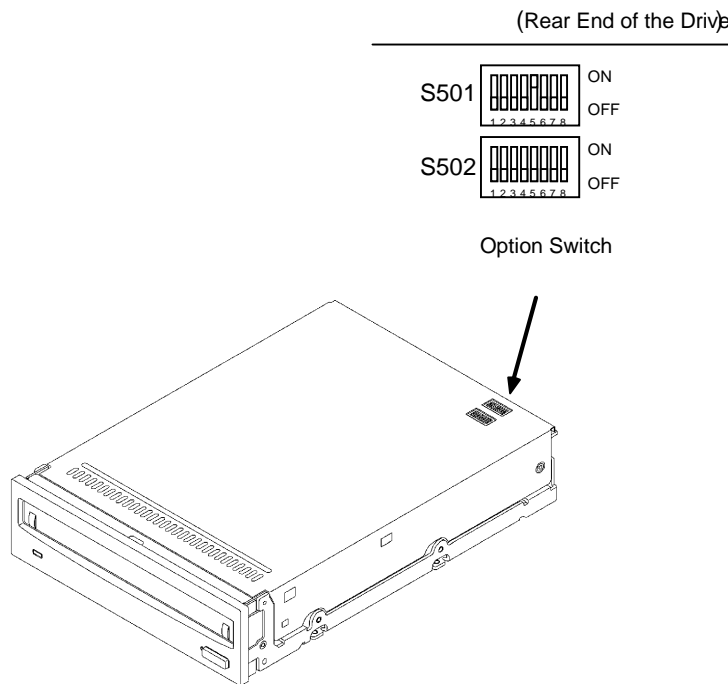

2AH Vendor Unique Emulation Page

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------|------------------|-----------------|--------------|--------|----------|--------|--------|
| 0 | PS (1) | Reserved | Page Code (21H) | | | | | |
| 1 | Page Length (0AH) | | | | | | | |
| 2 | Reserved | | | | | | | DAIR |
| 3 | DWR | Quick Disconnect | Reserved | Force Verify | DRBCHK | Reserved | | |
| 4 | S1 - 8 | S1 - 7 | S1 - 6 | S1 - 5 | S1 - 4 | S1 - 3 | S1 - 2 | S1 - 1 |
| 5 | S2 - 8 | S2 - 7 | S2 - 6 | S2 - 5 | S2 - 4 | S2 - 3 | S2 - 2 | S2 - 1 |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |

PES

Permit Erase bit of 1 indicates that ERASE command is permitted for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium.

This bit of 0 indicates that ERASE command is inhibited for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium.

RMWV

Read Modify Write Verify bit of 1 indicates that the drive always perform verify operation for sector updated by read modify write.

This bit of 0 indicates that the drive does not always perform verify operation for sectors updated by read modify write.

FV

Force Verify bit of 1 indicates that all write operations for 9.1 Gbyte/cartridge 512 and 1024 byte/sector medium will be verified.

This bit of 0 indicates normal operations.

START/STOP UNIT**1BH****FUNCTION**

Starts or stops the rotation of the medium and/or ejects the medium from the drive unit.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (1BH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | Immed |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | LoEj | Start |
| 5 | Reserved | | | | | | Flag | Link |

Immed

Immediate bit of 1 indicates that the status is returned as soon as the Command Descriptor Block has been validated. Immediate bit of 0 indicates that the status is returned after the command completion.

LoEj

Load Eject bit of 0 requests that no action will be taken regarding loading or ejecting the medium. Load Eject bit of 1 requests to unload the medium if Start bit is 0. Load Eject bit of 1 requests to load the medium if Start bit is 1.

Start

Start bit of 1 requests that the drive to be ready for use (start the rotation of the medium). Start bit of 0 requests to stop the drive (stop the rotation of the medium).

RECEIVE DIAGNOSTIC RESULTS 1CH

FUNCTION

Requests to send the diagnostic test data which is the result of Send Diagnostic Command to the initiator.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (1CH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Allocation Length (MSByte) | | | | | | | |
| 4 | Allocation Length (LSByte) | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

Allocation Length

Allocation Length field specifies the number of bytes allocated for returning data. Allocation Length of 0 indicates that no data is to be transferred. This condition is not considered as an error. The drive returns the number of either specified bytes or all available diagnostic data, whichever is less.

The form of Receive Diagnostic Results Page Codes is shown in the following table:

| Page Code | Maximum Transfer Length | Description |
|-----------|-------------------------|-----------------------------|
| 00H | 6 | Supported Diagnostics Pages |
| 81H | 10 | Controller Test |

RECEIVE DIAGNOSTIC RESULTS (1CH)

The form of Supported Diagnostic Pages is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Page Code (00H) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (0) (MSByte) | | | | | | | |
| 3 | Page Length (2) (LSByte) | | | | | | | |
| 4 | Supported Page List (00H) | | | | | | | |
| 5 | Supported Page List (81H) | | | | | | | |

The form of Controller Test is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|------------------------------|-------|-------|-------|-------|-------|-------|---------|
| 0 | Page Code (81H) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (0) (MSByte) | | | | | | | |
| 3 | Page Length (6) (LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | Success |
| 5 | Loop Count Completed | | | | | | | |
| 6 | Internal Error Code (MSByte) | | | | | | | |
| 7 | Internal Error Code | | | | | | | |
| 8 | Internal Error Code | | | | | | | |
| 9 | Internal Error Code (LSByte) | | | | | | | |

Success

This bit being 1 indicates that the Controller Test has passed without any internal error. Otherwise, this bit being 0 indicates that there is internal error(s).

Internal Error Code is explained in Appendix A.

SEND DIAGNOSTIC

1DH

FUNCTION

Requests the drive to perform diagnostic tests. This command should be followed by RECEIVE DIAGNOSTIC RESULTS command except when the Self Test bit is 1.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|--------|----------|----------|--------|---------|
| 0 | Operation Code (1DH) | | | | | | | |
| 1 | Logical Unit Number | | | PF (1) | Reserved | SelfTest | DevOfL | UnitOfL |
| 2 | Reserved | | | | | | | |
| 3 | Parameter List Length (MSByte) | | | | | | | |
| 4 | Parameter List Length (LSByte) | | | | | | | |
| 5 | Reserved | | | | | | Flag | Link |

PF

Page Format bit of 1 specifies that the SEND DIAGNOSTIC parameters conform to the page structure as specified in this manual. Page Format bit of 0 indicates that the SEND DIAGNOSTIC parameters are all vendor-specific. This bit is fixed to 1.

SelfTest

Self Test bit of 1 requests the Self Test to run. This Self Test is similar to the execution of test sequence 1 or Power-On sequence. If this bit is 1, the Parameter List Length must be 0. Self Test bit of 0 indicates the test is requested in the Parameter List (see Send Diagnostic Command Page Codes).

DeOfL

Device Off-Line bit of 1 must be set for proper operation of any test besides Self Test.

UnitOfL

Unit Off-Line bit of 1 must be set for proper operation of any test besides Self Test.

Parameter List Length

Indicates the number of parameter bytes in Data Out phase which defines the selected test. This value must be 0 if the SelfTest bit is set to 1.

SEND DIAGNOSTIC (1DH)

The form of the Send Diagnostic Command Page Codes is shown in the following table:

| Page Code | Maximum Transfer Length | Description |
|-----------|-------------------------|-----------------------------|
| 00H | 4 | Supported Diagnostics Pages |
| 81H | 12 | Controller Test |

The form of Supported Diagnostic Pages is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Page Code (00H) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (0) (MSByte) | | | | | | | |
| 3 | Page Length (0) (LSByte) | | | | | | | |

The form of the Controller Test is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|------------------------------------|-------|-------|-------|-------|-------|-------|
| 0 | Page Code (81H) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (0) (MSByte) | | | | | | | |
| 3 | Page Length (8) (LSByte) | | | | | | | |
| 4 | No Break | Test Number (see Diagnostic Table) | | | | | | |
| 5 | Loop Count | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

No Break

No Break bit of 1 directs the drive not to terminate looping when an error is detected.

Loop Count

This field contains the number of repetition of diagnostics to be performed. When this field is 00H, it means no repetition.

The following table shows the Diagnostic Test Name and its Test Number:

Diagnostic Table:

| Diagnostic Test Name | Test Number (Hex) |
|-----------------------------|--------------------------|
| Self Test | 0X01 |
| ROM Checksum Test | 0X02 |
| Microprocessor Test | 0X03 |
| Buffer RAM Test | 0X04 |
| ODC Chip Test | 0X05 |
| DSP Communication Test | 0X06 |

PREVENT/ALLOW MEDIUM REMOVAL 1EH**FUNCTION**

Prevents or allows the removal of the medium from the logical unit.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------|-------|-------|----------|-------|-------|-------|---------|
| 0 | Operation Code (1EH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | Prevent |
| 5 | Reserved | | | | | Flag | Link | |

Prevent

Prevent bit of 1 inhibits the removal of the medium. When this bit is set to 1, the ejection button of the drive is disabled and a START/STOP UNIT command with its eject bit set to 1 returns the CHECK CONDITION status. Prevent bit of 0 allows the removal of medium.

The prevention of medium removal is terminated upon receiving PREVENT/ALLOW MEDIUM REMOVAL command with prevent bit set to 0; BUS DEVICE RESET message from any initiator; or RESET condition.

READ CAPACITY**25H****FUNCTION**

Determines the capacity of the optical disk which is currently in the drive. The Logical Block Address and Block Length of the last logical block on the medium are returned.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|--------|
| 0 | Page Code (25H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | PMI |
| 9 | Reserved | | | | | Flag | Link | |

PMI

Partial Medium Indicator bit of 1 indicates that the Logical Block Address field does not need to be set to 0. Partial Medium Indicator bit of 0 indicates that the Logical Block Address field must be 0. This bit does not affect the returning values for this drive and the Logical Block Address is always set to 0. (This bit makes a difference when the medium is a partial ROM which is not commercially available at this point.)

READ CAPACITY (25H)

The form of Read Capacity Command Returned Data is shown in the following form:

| Byte | Description |
|-------------|-----------------------------|
| 0 | Logical Block Address (MSB) |
| 1 | Logical Block Address |
| 2 | Logical Block Address |
| 3 | Logical Block Address (LSB) |
| 4 | Block Length (MSB) |
| 5 | Block Length |
| 6 | Block Length |
| 7 | Block Length (LSB) |

READ(10)**28H****FUNCTION**

Reads the specified number of data starting from the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|----------|-------|-------|-------|----------|-------|--------|
| 0 | Page Code (28H) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | FUA | Reserved | | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | Reserved | | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to store Read-Ahead Data in the cache. Disable Page Out bit of 0 indicates that the drive may store the Read-Ahead Data after transferring the specified data to the initiator. However, the drive ignores this bit.

FUA

Force Unit Access bit of 1 indicates that the drive reads data from the disk. Force Unit Access bit of 0 indicates that the data may come from the cache memory.

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address bit of 0 indicates that logical block addressing is used.

READ(10) (28H)

Note:

If a blank block is detected during blank checking, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

WRITE(10)**2AH****FUNCTION**

Write data to the specified logical block address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|---------|----------|-------|-------|-------|----------|--------|
| 0 | Page Code (2AH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | FUA | EBP | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | ErsCntl | Reserved | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to store the data in the cache. Disable Page Out bit of 0 instructs the drive to store the data in the cache after it has been transferred to the medium. However, this bit is ignored.

FUA

Force Unit Access bit of 1 indicates that the data is written directly to the disk. Force Unit Access bit of 0 indicates the write caching will be allowed.

EBP

If the Erase Bypass bit is set to 0, ERASE operation is automatically performed before writing the data. Erase Bypass bit of 1 suppresses the ERASE operation.

WRITE(10) (2AH)

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that the physical block addressing is used. Physical Block Address bit of 0 indicates that the logical block addressing is used.

ErsCntl

Erase Control bit is identical to Erase Bypass bit.

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

SEEK(10)**2BH****FUNCTION**

Moves the optical head to the physical track where the specified logical block exists. This function is exactly the same as that of the SEEK (6) command.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|----------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (2BH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | PBA | Reserved | | | | Flag | Link | |

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address bit of 0 indicates that logical block addressing is used.

ERASE(10)**2CH****FUNCTION**

Erases the specified number of data blocks starting from the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|----------|-------|----------|-------|-------|----------|--------|
| 0 | Operation Code (2CH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | ERA | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | Reserved | | | | | Flag | Link |

ERA

Erase All bit of 1 indicates that all remaining blocks, starting from the specified Logical Block Address to the end of the disk, are erased. Transfer Length must be set to 0. Erase All bit of 0 indicates that all blocks, starting from the specified Logical Block Address for the specified Transfer Length, are erased.

Transfer Length

This field indicates the number of contiguous logical blocks to be erased by this command. A field value of 0 indicates that no blocks will be erased and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address bit 0 indicates that logical block addressing is used.

Write-Once Medium

If this command is executed for Write-Once medium, the drive returns a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 05H/20H/00H (ILLEGAL REQUEST/Invalid Command Operation Code).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

WRITE AND VERIFY(10)**2EH****FUNCTION**

Writes data to the medium and then verifies the written data by checking the Error Correction Code.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|---------|----------|-------|----------|-------|----------|--------|
| 0 | Operation Code (2EH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | Reserved | EBP | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | ErsCntl | Reserved | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to store the data in the cache after it has been transferred to the medium. Disable Page Out bit of 0 instructs the drive to store the data in the cache after it has been transferred to the medium. However, this bit is ignored.

EBP

If the Erase Bypass bit is set to 0, ERASE operation is automatically performed before writing the data. Erase Bypass bit of 1 suppresses the ERASE operation.

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that the physical block addressing is used. Physical Block Address bit of 0 indicates that the logical block addressing is used.

ErsCntl

Erase Control bit is identical to Erase Bypass bit.

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

VERIFY(10)

2FH

FUNCTION

Verifies the specified length of data starting from the specified Logical Block Address by reading and checking the Error Correction Code.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|-------|----------|--------|----------|--------|
| 0 | Operation Code (2FH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | Reserved | BlkVfy | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Verification Length (MSByte) | | | | | | | |
| 8 | Verification Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to retain the data in the cache after it has been verified. Disable Page Out bit of 0 instructs the drive to retain the data in the cache after it has been verified. However, this bit is ignored.

BlkVfy

Blank Verify bit of 1 indicates that the drive verifies whether the specified sectors are erased or not. Blank Verify bit of 0 indicates that the drive verifies the written data integrity.

Verification Length

This field indicates the number of contiguous logical blocks to be verified by this command. A field value of 0 indicates that no blocks will be verified and this is not considered as an error.

Note:

If a blank sector is detected during operation, the drive returns a CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

PRE-FETCH 34H**FUNCTION**

Transfers the specified number of data blocks starting from the specified Logical Blocks Address to the cache memory.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|--------|
| 0 | Operation Code (34H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | Immed | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

Immed

Immediate bit of 1 indicates that the drive returns a status as soon as the Command Descriptor Block is validated. Immediate bit of 0 indicates that the status is not returned until the operation is completed.

Transfer Length

This field indicates the number of contiguous logical blocks of data to be transferred.

SYNCHRONIZE CACHE**35H****FUNCTION**

Ensures the logical blocks in the cache memory have their most recent data values recorded within the specified range of the optical disk. If more recent values exist in the cache memory, then the logical blocks on the optical disk will be replaced with the values in the cache memory.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|--------|
| 0 | Operation Code (35H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | Immed | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Number of Blocks (MSByte) | | | | | | | |
| 8 | Number of Blocks (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

Immed

Immediate bit of 1 indicates that the drive returns a status as soon as the Command Descriptor Block is validated. Immediate bit of 0 indicates that the status is not returned until the operation is completed.

Number of Blocks

Number of Blocks field specifies the total number of contiguous logical blocks on the disk of the range. Number of Blocks bit of 0 indicates that all the existing logical blocks on the disk is considered to be in the range. Logical block within the specified range of the disk and not in the cache memory is not considered as an error.

READ DEFECT DATA(10)**37H****FUNCTION**

Reads the optical disk's defect information. The returning data contains a four byte header followed by zero or more Defect Descriptors.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-------|----------|-------|--------------------|-------|-------|
| 0 | Operation Code (37H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | PList | GList | Defect List Format | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Allocation Length (MSByte) | | | | | | | |
| 8 | Allocation Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | Flag | Link | |

PList, GList

Grown List bit of 1 (and regardless of Primary List bit) indicates that the drive will return the contents of Primary Defect List and Secondary Defect List. Primary List bit of 1 and Grown List of 0 indicates that the drive will return only the contents of Primary Defect List.

Defect List Format

This field specifies the Format of returning Defect List. Only the Physical Sector Format(5) is supported. If the Block Format(0) is specified, the defect list will be returned in Physical Sector Format and a CHECK CONDITION status will be returned at the completion of the command with Sense Key/Additional Sense Code/Additional Sense Code Qualifier set to 01H/19H/01H (RECOVERED ERROR/Defect List Not Available).

Allocation Length

This field specifies the number of bytes that the initiator has allocated for the returning data. Allocation Length of 0 indicates that no data will be returned. This condition is not considered as an error. The drive will terminate the data-in-phase when the Allocation Length has been transferred or when all the available defect data has been transferred to the initiator, whichever

with less length.

The format of returning Read Defect Data List Header is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|--------------------|-------|-------|
| 0 | Reserved | | | | | | | |
| 1 | Reserved | | | PList | GList | Defect List Format | | |
| 2 | Defect List Length (MSByte) | | | | | | | |
| 3 | Defect List Length (LSByte) | | | | | | | |

PList

Primary List bit of 1 indicates that the Primary List of defects was returned.

GList

Grown List bit of 1 indicates that the Grown List of defects was returned.

Defect List Format

This field will be set as the same value indicated in Defect List Format field (which has the fixed value of 5) of CDB. And this specifies the format of the Defect List Data returned by the drive.

Defect List Length

This field specifies the total length of the Defect Descriptor in bytes.

The format of Physical Sector Format Defect Descriptor is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|-------|-------|-------|-------|-------|-------|
| 0 | Physical Track Number of the Defect (MSByte) | | | | | | | |
| 1 | Physical Track Number of the Defect | | | | | | | |
| 2 | Physical Track Number of the Defect (LSByte) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Defective Physical Sector Number | | | | | | | |

MEDIUM SCAN**38H****FUNCTION**

Scans the medium for a contiguous set of written or blank logical blocks. In order to use this command with rewritable or CCW media, all the sectors has to be erased beforehand.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|----------|-------|---------|---------|---------|--------|
| 0 | Operation Code (38H) | | | | | | | |
| 1 | Logical Unit Number | | | WBS | ASA (0) | RSD (0) | PRA (0) | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Parameter List Length | | | | | | | |
| 9 | VU (0) | | Reserved | | | | Flag | Link |

WBS

Written Block Search bit being 0 indicates the scan is for blank blocks.

Written Block Search bit being 1 indicates the scan is for written blocks.

ASA

Advanced Scan Algorithm bit being 0 indicates that the scan area is scanned in sequential order. This bit cannot be changed.

RSD

Reverse Scan Direction bit of 0 indicates that the scan will begin from the first logical block of the scan area. This bit cannot be changed.

PRA

Partial Results Accepted bit of 0 indicates that the scan will not be completed until a contiguous set of blocks is found, within the scan area which is greater than or equal to the number of blocks requested in size. And the other criteria specified in the Command Descriptor Block have to be met. This bit cannot be changed.

RA

Relative Address bit of 0 indicates that the LBA field is not a relative address but an absolute address. This means the relative addressing function of linked commands is not in effect. This bit cannot be changed.

Parameter List Length

This field specifies the length of the list which will be transferred during the data out phase in bytes. Parameter List Length bit being 0 indicates that the Number of Blocks Requested and Number of Blocks to Scan have the values of 1 and 0, respectively.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Number of Blocks Requested (MSByte) | | | | | | | |
| 1 | Number of Blocks Requested | | | | | | | |
| 2 | Number of Blocks Requested | | | | | | | |
| 3 | Number of Blocks Requested (LSByte) | | | | | | | |
| 4 | Number of Blocks to Scan (MSByte) | | | | | | | |
| 5 | Number of Blocks to Scan | | | | | | | |
| 6 | Number of Blocks to Scan | | | | | | | |
| 7 | Number of Blocks to Scan (LSByte) | | | | | | | |

Number of Blocks Requested

This field specifies the number of continuous blocks that must meet the specified requirements (all written or all blank). If set to zero, the scan will not take place and this is not considered an error condition. The maximum value for the Number of Blocks Requested is 65535 (FFFF H).

In order to ensure reliability for all media conditions and environments, the scan for minimum of two contiguous blanks when the WBS bit is set to zero, and the Number of Blocks Requested field is set to one.

Number of Blocks to Scan

This field specifies the length of the area to be scanned in blocks. If set to zero, the scan will continue for all the remaining blocks on the medium or until the scan is satisfied.

A link bit of zero indicates a non-linked command; if the scan is satisfied, the command shall be terminated with a CONDITION MET status.

A REQUEST SENSE command can then be issued to determine the starting logical block address of the area that meets the request. If the scan is not satisfied and no error occurs, the command shall be terminated with GOOD status.

MEDIUM SCAN (38H)

A link bit of one indicates that a command is linked to the MEDIUM SCAN command; if the search is satisfied, CONDITION MET status is returned and the next command is executed. If the RelAdr bit in the next command is one, the logical block address of the next command is used as a displacement from the logical block address at which the search was satisfied. If a linked scan is not satisfied, the command is terminated with a CHECK CONDITION status.

A REQUEST SENSE command following a satisfied MEDIUM SCAN command shall:

- a) return a sense key of EQUAL if the scan was satisfied by a contiguous set of blocks equal in size to the number of blocks requested. If the PRA bit is one and the scan was satisfied by a contiguous set of blocks less than the number of blocks requested, then a sense key of NO SENSE shall be returned;
- b) return the valid bit set to one;
- c) return the logical block address of the first logical block of the contiguous set of blocks that satisfied the scan criteria in the information bytes;
- d) return the number of contiguous logical blocks meeting the scan criteria in the command specific information bytes.

A REQUEST SENSE command following an unsatisfied MEDIUM SCAN command shall:

- a) return a sense key of NO SENSE if no errors occurred during the command execution;
- b) return the valid bit set to zero.

WRITE BUFFER**3BH****FUNCTION**

Writes data to the data buffer.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (3BH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | Mode | | |
| 2 | Buffer ID | | | | | | | |
| 3 | Buffer Offset (MSByte) | | | | | | | |
| 4 | Buffer Offset | | | | | | | |
| 5 | Buffer Offset (LSByte) | | | | | | | |
| 6 | Parameter List Length (MSByte) | | | | | | | |
| 7 | Parameter List Length | | | | | | | |
| 8 | Parameter List Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

Mode

This field indicates which data format is used. Refer to the table of Buffer Access Mode and ID.

Buffer ID

This field indicates which buffer is used. Refer to the table of Buffer Access Mode and ID.

Buffer Offset

This field indicates the address of the buffer data with the offset from the beginning of the buffer.

Parameter List Length

This field indicates the length of data bytes to be written in the buffer.

Buffer Access Mode and ID

| Buffer Type | Buffer ID | Mode |
|-------------|-----------|------|
| Buffer RAM | 0 | 0 |

Buffer RAM

This mode indicates that the data buffer space is used for data transfer to/from the optical disk.

Mode field specifies the function of this command and meaning of fields within the Command Descriptor Block. Mode field is defined in following table.

| Mode | Description |
|------|---|
| 000b | writes Combined Header and Data (Buffer Offset = 0) |
| 001b | writes Combined Header and Data |
| 010b | writes Data |

Combined Header and Data Mode (000b, 001b)

With this mode, the transfer data consists of a four-byte header and the write buffer data. Transfer data length is specified by the Parameter List Length field. Parameter List Length of zero indicates that no write buffer header and no write data is transferred. This condition is not considered as an error. The maximum number of bytes that shall be transferred during the DATA OUT phase is indicated by the Buffer Capacity of the four-byte header, that is determined by the READ BUFFER command. If Mode is 0, the write buffer data is stored in the buffer memory starting from address 0. In this case, the Buffer Offset field must be set to 0. If the Mode is 1, the Buffer Offset field indicates the starting address of the buffer memory where the WRITE BUFFER data is written.

The four-byte header consists of all reserved bytes showed in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Reserved | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |

Data Mode (010b)

With this mode, transfer data contains buffer data during the DATA OUT phase. Buffer Offset field specifies the location where the data is written. Parameter List Length field specifies the number of bytes that shall be transferred and stored in the buffer memory during the DATA OUT phase. Buffer offset plus Parameter List Length shall not exceed the capacity of the buffer memory.

READ BUFFER**3CH****FUNCTION**

Reads data from the data buffer of the drive.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (3CH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | Mode | | |
| 2 | Buffer ID | | | | | | | |
| 3 | Buffer Offset (MSByte) | | | | | | | |
| 4 | Buffer Offset | | | | | | | |
| 5 | Buffer Offset (LSByte) | | | | | | | |
| 6 | Parameter List Length (MSByte) | | | | | | | |
| 7 | Parameter List Length | | | | | | | |
| 8 | Parameter List Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | Flag | Link | |

Mode

This field indicates which data format is used. Refer to the table of Buffer Access Mode and ID.

Buffer ID

This field indicates which buffer is used. Refer to the table of Buffer Access Mode and ID.

Buffer Offset

This field indicates the address the data should be read from with the offset from the beginning of the buffer.

Parameter List Length

This field indicates the length of data bytes to be read from the buffer.

Buffer Access Mode and ID

| Buffer Type | Buffer ID | Mode |
|-------------|-----------|------|
| Buffer RAM | 0 | 0 |

Mode field specifies the function of this command and meaning of fields within the Command Descriptor Block. Mode field is defined in following table:

| Mode | Description |
|------|--|
| 000b | transfers Combined Header and Data (Buffer Offset = 0) |
| 001b | transfers Combined Header and Data |
| 010b | transfers Data |
| 011b | transfers Descriptor |

Combined Header and Data Mode (000b, 001b)

With this mode, a four-byte header followed by data bytes is returned to the initiator during the DATA IN phase. The four-byte header has the following format:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Reserved | | | | | | | |
| 1 | Buffer Capacity (MSByte) | | | | | | | |
| 2 | Buffer Capacity | | | | | | | |
| 3 | Buffer Capacity (LSByte) | | | | | | | |

If the mode is zero, the buffer offset field must be set to 0. Parameter List Length specifies the number of bytes that the initiator has allocated for the returning data. The drive transfers the Parameter List Length bytes or the four-byte header and the buffer data, whichever is less.

Buffer Capacity

This field returns the size of the buffer memory.

Data Mode (010b)

With this mode, the transfer data contains buffer data during the DATA IN phase. Buffer Offset field contains the offset bytes where data shall be transferred from within the data buffer of the drive. Parameter List Length specifies the number of bytes that the initiator has allocated for the returning data. The drive transfers the Parameter List Length bytes or all the available data from the buffer, whichever is less.

Descriptor Mode (011b)

With this mode, READ BUFFER descriptor information with the maximum size of four-bytes is returned. Buffer Offset field is reserved in this mode. READ BUFFER descriptor is as follows:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Offset Boundary | | | | | | | |
| 1 | Buffer Capacity (MSByte) | | | | | | | |
| 2 | Buffer Capacity | | | | | | | |
| 3 | Buffer Capacity (LSByte) | | | | | | | |

Offset Boundary

This field returns the boundary address of subsequent WRITE BUFFER and READ BUFFER commands in the buffer memory. The value of Offset Boundary field is expressed in powers of two (i. e. = 2ⁿ). As the drive has byte boundaries, it returns zero for Offset Boundary field.

READ LONG**3EH****FUNCTION**

Read data from the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---|-------|----------|----------|-------|-------|-------|--------|
| 0 | Operation Code (3EH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | RelAdr |
| 2 | Starting Logical Block Address (MSByte) | | | | | | | |
| 3 | Starting Logical Block Address | | | | | | | |
| 4 | Starting Logical Block Address | | | | | | | |
| 5 | Starting Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | SC | Reserved | | | | Flag | Link |

Transfer Length

This field specifies the number of data bytes and Error Correction Code information to be read.

- * 4096 media = 4760 bytes (4096 data + 664 pointers, CRC, pad and ECC)
- * 2048 media = 2380 bytes (2048 data + 332 pointers, CRC, pad and ECC)
- * 1024 media = 1200 bytes (1024 data + 176 pointers, CRC, pad and ECC)
- * 512 media = 610 bytes (512 data + 98 pointers, CRC, pad and ECC)
- * all other numbers are rejected unless SC = 1

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address bit of 0 indicates that logical block addressing is used.

SC

Sector Count bit of 1 indicates that the Transfer Length is represented in sectors rather than bytes. Sector Count bit of 0 indicates that the Transfer Length is represented in bytes.

READ LONG (3EH)

Write-Once Medium

If a blank block is detected during blank checking, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

WRITE LONG**3FH****FUNCTION**

Writes data to the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---|-------|----------|----------|-------|-------|-------|--------|
| 0 | Operation Code (3FH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | RelAdr |
| 2 | Starting Logical Block Address (MSByte) | | | | | | | |
| 3 | Starting Logical Block Address | | | | | | | |
| 4 | Starting Logical Block Address | | | | | | | |
| 5 | Starting Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | PBA | SC | Reserved | | | | Flag | Link |

Transfer Length

This field specifies the number of data bytes and Error Correction Code information to be read.

- * 4096 media = 4760 bytes (4096 data + 664 pointers, CRC, pad and ECC)
- * 2048 media = 2380 bytes (2048 data + 332 pointers, CRC, pad and ECC)
- * 1024 media = 1200 bytes (1024 data + 176 pointers, CRC, pad and ECC)
- * 512 media = 610 bytes (512 data + 98 pointers, CRC, pad and ECC)
- * all other numbers are rejected unless SC = 1

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. Physical Block Address bit of 0 indicates that logical block addressing is used.

SC

Sector Count bit of 1 indicates that the Transfer Length is represented in sectors rather than bytes. Sector Count bit of 0 indicates that the Transfer Length is represented in bytes.

WRITE LONG (3FH)

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

CHANGE DEFINITION**40H****FUNCTION**

Modifies the operating definition of the drive.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------|----------------------|-------|----------|-------|-------|-------|-------|
| 0 | Operation Code (40H) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | Reserved | | | | | | | Save |
| 3 | Reserved | Definition Parameter | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Parameter Data Length | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

Save

This Save Control bit is not supported by this drive. Save Control bit of 1 indicates that the drive will return a CHECK CONDITION status. Additional Sense Key/Additional Sense Code Additional Sense Code Qualifier is set to 05H/24H/00H (ILLEGAL REQUEST/Illegal Field in CDB).

Definition Parameter

This field is defined in following table:

| Value | Meaning of Definition Parameter |
|-------|----------------------------------|
| 00H | Use Current Operating Definition |
| 01H | SCSI-1 |
| 02H | CCS |
| 03H | SCSI-2 |
| 40H | Sony SCSI-1 |

CHANGE DEFINITION (40H)

If SCSI-1 and CCS Definition Parameters are set to the Definition Parameter field, the drive internally modifies these parameters to the Sony SCSI-1 operating definition.

Parameter Data Length

Parameter Data Length field should be set to 0. Otherwise the drive returns a CHECK CONDITION status.

LOG SELECT**4CH****FUNCTION**

Clears drive logs.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|----------|----------|-------|-------|-------|-------|
| 0 | Operation Code (4CH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | |
| 2 | PC (01H) | | Reserved | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Parameter List Length (MSByte) | | | | | | | |
| 8 | Parameter List Length (LSByte) (See the table) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

PC

Page Control field defines the type of parameter values to be returned as follows:

| Bit 7 | Bit 6 | type of parameter values |
|-------|-------|--------------------------|
| 0 | 1 | Changeable Values |

This field value is fixed.

Parameter List Length

The Parameter List Length field specifies the length of the Parameter List which will be transferred from the initiator to the drive in bytes during the DATA OUT phase. A Parameter List Length of 0 indicates that no pages will be transferred and this condition is not considered as an error.

LOG SELECT (4CH)

The ONLY capability that the initiator is given from the Log Select is to reset the cumulative logs. The following table shows the format of Parameter List Data for Byte 8 of the Log Select command:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Page Code (see the table) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Page Length | | | | | | | |
| 4 | Parameter Code (MSByte) | | | | | | | |
| 5 | Parameter Code (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Reserved | | | | | | | |
| 8 | Reserved | | | | | | | |
| 9 | Reserved | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |

Page Code

Page Code values are defined in the following table:

| Page Code | Description | Parameter Code |
|-----------|---------------------------|----------------|
| 02H | Write Error Counter Page | 8000 |
| 03H | Read Error Counter Page | 8000 |
| 05H | Verify Error Counter Page | 8000 |
| 07H | Last n Error Counter Page | 1000 |
| 33H | Erase Error Counter Page | 8000 |
| 34H | Blank Error Counter Page | 8000 |

LOG SENSE

4DH

FUNCTION

Manages the statistical information maintained by the drive.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-----------|-------|-------|-------|-------|-------|
| 0 | Operation Code (4DH) | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | PC (01H) | | Page Code | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Parameter Pointer (MSByte) | | | | | | | |
| 6 | Parameter Pointer (LSByte) | | | | | | | |
| 7 | Allocation Length (MSByte) | | | | | | | |
| 8 | Allocation Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

PC

Page Control field defines the type of parameter values to be returned as follows:

| Bit 7 | Bit 6 | type of parameter values |
|-------|-------|--------------------------|
| 0 | 1 | Changeable Values |

This field value is fixed.

Parameter Pointer

When the initiator requests to recall parameter data, the drive returns the data starting from the Parameter Code indicated by the Parameter Pointer for the length of either the maximum Allocation Length or the maximum Parameter Code, whichever is less. Log parameters within the specified Log Page are transferred in ascending order according to Parameter Code.

Allocation Length

The number of parameter bytes allocated for the Log Page and the Parameter Codes/Structure.

Page Codes

Page Codes are defined in the following table:

| Page Code | Description |
|-----------|---|
| 00H | Supported Log Pages |
| 02H | Error Counter Page for Write Errors |
| 03H | Error Counter Page for Read Errors |
| 05H | Error Counter Page for Verify Errors |
| 07H | Last n Error Events Page |
| 33H | Error Counter Page for Erase Errors |
| 34H | Error Counter Page for Blank Check Errors |

Supported Log Page 00H

The Supported Log Page returns the list of log pages implemented by the drive (Supported Page List).

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-----------------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code (00H) | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (n-3) (MSByte) | | | | | | | |
| 3 | Page Length (n-3) (LSByte) | | | | | | | |
| 4 | Supported Page List | | | | | | | |
| | Supported Page List | | | | | | | |
| n | Supported Page List | | | | | | | |

Page Length

Page Length field indicates the length of the following log parameters in bytes.

Log Page Format

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------------------------|----------------------------|-------|-----------|-------|-------|-------|-------|-------|
| 0 | Reserved | | Page Code | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Page Length (n-3) (MSByte) | | | | | | | |
| 3 | Page Length (n-3) (LSByte) | | | | | | | |
| Log Parameter(s) | | | | | | | | |
| 4 | Log Parameter (First) | | | | | | | |
| X + 3 | (Length x) | | | | | | | |
| | | | | | | | | |
| N - y | Log Parameter (Last) | | | | | | | |
| n | (Length y) | | | | | | | |

Log Parameter

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------------------------|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Parameter Code (MSByte) | | | | | | | |
| 1 | Parameter Code (LSByte) | | | | | | | |
| 2 | Reserved | | | | | | | |
| 3 | Parameter Length (n-3) | | | | | | | |
| Parameter Value | | | | | | | | |
| 4 | Parameter Value (MSByte) | | | | | | | |
| | | | | | | | | |
| n | Parameter Value (LSByte) | | | | | | | |

Parameter Codes/Structure for Error Counter Pages

| Parameter Code | Length Bytes | Description |
|----------------|--------------|---------------------------------------|
| 1 | 12 | Sectors Corrected with Retries |
| 2 | 12 | Total Number of Retry Attempts |
| 3 | 12 | Total Sectors Corrected |
| 5 | 14 | Total Bytes Processed |
| 6 | 12 | Total Number of Uncorrectable Sectors |
| 0 | 46 | Request for all Pages |

Parameter Codes/Structure for Last n Error Event Page

| Parameter Code | Length Bytes | Description |
|----------------|--------------|---|
| 0 | 10 | Number of Events in the Log (Maximum Events = 50) |
| 1 | 34 | Most Recent Error Event Log |
| 2 | | Next Most Recent Error Event Log |
| • | • | • |
| • | • | • |
| • | • | • |
| n | 7510 | Request for all Pages |

Error Event Log

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|------------------|-------|-------|-------|-------|-------|-------|
| 0 | Log Type (1 - READ, 2 - WRITE, 3 - ERASE, 4 - VERIFY, 5 - BLANK CHECK) | | | | | | | |
| 1 | Occurrence Count | | | | | | | |
| 2 | Long (1) | Power On Minutes | | | | | | |
| 3 | Half Seconds | | | | | | | |
| 4 | Half Seconds Fraction (16 μ Sec) (MSByte) | | | | | | | |
| 5 | Half Seconds Fraction (16 μ Sec) (LSByte) | | | | | | | |
| 6 | Power On Hours (MSByte) | | | | | | | |
| 7 | Power On Hours | | | | | | | |
| 8 | Power On Hours | | | | | | | |
| 9 | Power On Hours (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | | |
| 12 | Reserved | | | | | | | |
| 13 | Reserved | | | | | | | |
| 14 | Internal Error Code (MSByte) | | | | | | | |
| 15 | Internal Error Code | | | | | | | |
| 16 | Internal Error Code | | | | | | | |
| 17 | Internal Error Code (LSByte) | | | | | | | |
| 18 | Logical Block Address (MSByte) | | | | | | | |
| 19 | Logical Block Address | | | | | | | |
| 20 | Logical Block Address | | | | | | | |
| 21 | Logical Block Address (LSByte) | | | | | | | |
| 22 | Physical Block Address (MSByte) | | | | | | | |
| 23 | Physical Block Address | | | | | | | |
| 24 | Physical Block Address | | | | | | | |
| 25 | Physical Block Address (LSByte) | | | | | | | |

MODE SELECT(10)**55H****FUNCTION**

MODE SELECT command sets the optical disk and drive parameters for READ, WRITE, FORMAT and ERASE commands.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|-------|----------|-------|-------|-------|
| 0 | Operation Code (55H) | | | | | | | |
| 1 | Logical Unit Number | | | PF | Reserved | | | SP |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Parameter List Length (MSByte) | | | | | | | |
| 8 | Parameter List Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | Flag | Link | |

PF

Page Format bit of 0 indicates that all the parameters after the Block Descriptors are vendor-specific. This bit of 1 indicates that the parameters following the Header and Block Descriptor(s) are structured as the specified in the following pages.

Page Format bit is not supported by the drive and has no effect on the drive.

SP

Save Pages bit of 1 indicates that the drive performs the specified MODE SELECT operation, and saves all the savable data to non-volatile storage. The data is saved only if it is different from those currently saved. Save Page bit of 0 indicates that the drive performs the specified MODE SELECT operation and does not save any pages.

Parameter List Length

This field specifies the length of the MODE SELECT Parameter List in bytes that the initiator will transfer to the drive during the DATA OUT phase. Parameter List Length of 0 indicates that no data will be transferred. This condition is not considered as an error.

In this command, the Mode Select Parameter Header is extended to 8 byte. The MODE SELECT parameter list format is as follows:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------------------------------------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| Mode Select Parameter Header | | | | | | | | |
| 0 | Reserved | | | | | | | |
| 1 | Reserved | | | | | | | |
| 2 | Medium Type | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Block Descriptor Length (MSByte) | | | | | | | |
| 7 | Block Descriptor Length (LSByte) | | | | | | | |
| Block Descriptor(s) | | | | | | | | |
| 8 - m | Block Descriptor | | | | | | | |
| Page(s) | | | | | | | | |
| m - n | Page | | | | | | | |

Medium Type

Medium Type field shall be set to 00H (only one medium type is supported), 02H (WO media) or 03H (Rewritable medium).

Block Descriptor Length

Block Descriptor Length specifies the length of Block Descriptors in bytes. It shall be equal to the number of Block Descriptors times 8. Block Descriptor Length of 0 indicates that no Block Descriptor is included in the parameter list. This condition is not considered as an error. Block Descriptor has no effect on the drive.

MODE SELECT(10) (55H)

The form of Block Descriptor is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Density Code | | | | | | | |
| 1 | Number of Blocks (MSByte) | | | | | | | |
| 2 | Number of Blocks | | | | | | | |
| 3 | Number of Blocks (LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Block Length (MSByte) | | | | | | | |
| 6 | Block Length | | | | | | | |
| 7 | Block Length(LSByte) | | | | | | | |

Refer to the MODE SELECT (Group 0) command for detailed information about each page.

MODE SENSE(10)**5AH****FUNCTION**

Acquires the parameters of medium, drive and drive controller.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-----------|-------|-------|----------|-------|-------|
| 0 | Operation Code (5AH) | | | | | | | |
| 1 | Logical Unit Number | | | Rsvrd | DBD | Reserved | | |
| 2 | PC | | Page Code | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Allocation Length (MSByte) | | | | | | | |
| 8 | Allocation Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

DBD

Disable Block Descriptors bit of 1 indicates that the Block Descriptor is not provided. On the other hand, this bit being 0 indicates that the Block Descriptor is provided.

PC

Page Control field defines the type of parameter values to be returned as follows:

| bit 7 | bit 6 | Type of parameter Values |
|-------|-------|--------------------------|
| 0 | 0 | Current Values |
| 0 | 1 | Changeable Values |
| 1 | 0 | Default Values |
| 1 | 1 | Saved Values |

Page Code

Page Code values are the same as for the Mode Select (Group 0) command. If 00H or 3FH is specified, all the pages are returned.

Allocation Length

This field specifies the number of bytes that the initiator has allocated for the return of this data. Allocation Length bit of 0 indicates that there will be no returned data. This condition is not considered as an error. The drive will terminate the data-in-phase either when the Allocation Length has been transferred or when all the available data has been transferred to the initiator, whichever with less length.

MODE SENSE Parameter Header is defined in following table.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------------|----------|-------|--------|----------|-------|-------|-------|
| 0 | Mode Data Length (MSByte) | | | | | | | |
| 1 | Mode Data Length (LSByte) | | | | | | | |
| 2 | Medium Type | | | | | | | |
| 3 | WP | Reserved | | DPOFUA | Reserved | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Block Descriptor Length (MSByte) | | | | | | | |
| 7 | Block Descriptor Length (LSByte) | | | | | | | |

Mode Data Length

This field specifies the length of MODE SENSE data to follow in bytes.

Medium Type

Medium Type field is set to 00H (default: only one medium type to be supported), 02H (Write-Once medium), or 03H (rewritable medium) depending on the drive condition. It will be set to 00H for no disk or not ready condition and 02H or 03H if it is ready to access the medium.

WP

Write Protect bit of 1 indicates that the optical disk in the drive is write protected.

DPOFUA

This bit indicates DPO/FUA (DPO: Disable Page Out, FUA: Force Unit Access) is supported or not. This bit being 1 indicates DPO/FUA flag is supported. This bit being 0 indicates DPO/FUA is not supported. This bit is fixed to be 1.

Block Descriptor Length

Block Descriptor Length field specifies the length of the Block Descriptor in bytes. This field is set to 8 when DBD bit is 0. Otherwise, this field is set to 0.

The format of Block Descriptor is show in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| 0 | Density Code | | | | | | | |
| 1 | Number of Blocks (MSByte) | | | | | | | |
| 2 | Number of Blocks | | | | | | | |
| 3 | Number of Blocks (LSByte) | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Block Length (MSByte) | | | | | | | |
| 6 | Block Length | | | | | | | |
| 7 | Block Length (LSByte) | | | | | | | |

Refer to the MODE SELECT (Group 0) command for detailed information about each page.

READ(12)**A8H****FUNCTION**

Reads data from the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|----------|-------|-------|-------|----------|-------|--------|
| 0 | Operation Code (A8H) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | FUA | Reserved | | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Transfer Length (MSByte) | | | | | | | |
| 7 | Transfer Length | | | | | | | |
| 8 | Transfer Length | | | | | | | |
| 9 | Transfer Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | PBA | Reserved | | | | Flag | Link | |

DPO

Disable Page Out bit of 1 instructs the drive not to store Read-Ahead Data in the cache. Disable Page Out bit of 0 indicates that the drive may store the Read-Ahead Data after transferring the specified data to the initiator. However, this bit is ignored.

FUA

Force Unit Access bit of 1 indicates that the drive reads data from the disk. Force Unit Access bit of 0 indicates that the data may come from the cache memory.

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that physical block addressing is used. A field value of 0 indicates that logical block addressing is used.

Note:

If a blank block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

WRITE(12)**AAH****FUNCTION**

Writes the specified number of data to the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|---------|----------|-------|-------|-------|----------|--------|
| 0 | Operation Code (AAH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | FUA | EBP | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Transfer Length (MSByte) | | | | | | | |
| 7 | Transfer Length | | | | | | | |
| 8 | Transfer Length | | | | | | | |
| 9 | Transfer Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | PBA | ErsCntl | Reserved | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to store the data in the cache. Disable Page Out bit of 0 instructs the drive to store the data in the cache after it has been transferred to the medium. However, this bit is ignored.

FUA

Force Unit Access bit of 1 indicates that the data is written directly to the disk. Force Unit Access bit of 0 indicates the write caching will be allowed.

EBP

If the Erase Bypass bit is set to 0, the ERASE operation is automatically performed before writing the data. Erase Bypass bit of 1 suppresses the ERASE operation.

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that the physical block addressing is used. Physical Block Address bit of 0 indicates that the logical block addressing is used.

ErsCntl

Erase Control bit is identical to Erase Bypass bit.

Write-Once Medium

If a written block is detected during blank checking, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

ERASE(12)**ACH****FUNCTION**

Erases the specified number of data blocks starting from the specified Logical Block Address.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|----------|-------|----------|-------|-------|----------|--------|
| 0 | Operation Code (ACH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | ERA | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Transfer Length (MSByte) | | | | | | | |
| 7 | Transfer Length | | | | | | | |
| 8 | Transfer Length | | | | | | | |
| 9 | Transfer Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | PBA | Reserved | | | | Flag | | Link |

ERA

Erase All bit of 1 indicates that all remaining block are erased, starting from the specified Logical block Address to the end of the disk. Transfer Length must be set to 0. Erase All bit of 0 indicates that all blocks are erased, starting from the Logical Block Address to the end of the specified Transfer Length.

Transfer Length

This field indicates the number of contiguous logical blocks to be erased for this command. A field value of 0 indicates that no blocks will be erased and is no considered as an error.

PBA

Physical Block Address bit of 1 indicates that Physical block addressing is used. Physical Block Address bit 0 indicates that logical block addressing is used.

Write-Once Medium

If this command is executed for Write-Once medium, the drive returns a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 05H/20H/00H (ILLEGAL REQUEST/Invalid Command Operation Code).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

WRITE AND VERIFY(12)**AEH****FUNCTION**

Writes the specified number of data blocks starting from the specified Logical Block Address and then verifies the WRITE by reading the written data and checking the Error Correction Code.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|---------|----------|-------|----------|-------|----------|--------|
| 0 | Operation Code (AEH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | Reserved | EBP | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Transfer Length (MSByte) | | | | | | | |
| 7 | Transfer Length | | | | | | | |
| 8 | Transfer Length | | | | | | | |
| 9 | Transfer Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | PBA | ErsCntl | Reserved | | | Flag | Link | |

DPO

Disable Page Out bit of 1 instructs the drive not to store the data in the cache after it has been transferred to the medium. Disable Page Out bit of 0 instructs the drive to store the data in the cache after it has been transferred to the medium. However, this bit is ignored.

EBP

If the Erase Bypass bit is set to 0, the ERASE operation is automatically performed before writing the data. Erase Bypass bit of 1 suppresses the ERASE operation.

Transfer Length

This field indicates the number of contiguous logical blocks to be transferred for this command. A field value of 0 indicates that no blocks will be transferred and this is not considered as an error.

PBA

Physical Block Address bit of 1 indicates that the physical block addressing is used. Physical Block Address bit of 0 indicates that the logical block addressing is used.

ErsCntl

Erase Control bit is identical to Erase Bypass bit.

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte media are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

VERIFY(12)

AFH

FUNCTION

Verifies the specified number of data blocks starting from the specified Logical Block Address by reading the data and checking the Error Correction Code.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|-------|----------|--------|----------|--------|
| 0 | Operation Code (AFH) | | | | | | | |
| 1 | Logical Unit Number | | | DPO | Reserved | BlkVfy | Reserved | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Verification Length (MSByte) | | | | | | | |
| 7 | Verification Length | | | | | | | |
| 8 | Verification Length | | | | | | | |
| 9 | Verification Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | | Flag | Link |

DPO

Disable Page Out bit of 1 instructs the drive not to retain the data in the cache after it has been verified. Disable Page Out bit of 0 instructs the drive to retain the data in the cache after it has been verified. This bit is ignored.

BlkVfy

Blank Verify bit of 1 indicates the drive verifies if the specified sectors are erased. Blank Verify bit of 0 indicates that the drive verifies the written data integrity.

Verification Length

This field indicates the number of contiguous logical blocks to be verified for this command. A field value of 0 indicates that no blocks will be verified and this is not considered as an error.

Note:

If a blank sector is detected during operation, the drive returns a CHECK CONDITION status and sets the Sense Key/Additional Sense Code/Additional Sense Code Qualifier to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

READ DEFECT DATA(12)

B7H

FUNCTION

Reads the optical disk defect information. The returned data contains an eight byte header, followed by zero or more Defect Descriptor.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|----------------------------|-------|-------|-------|-------|--------------------|-------|-------|
| 0 | Operation Code (B7H) | | | | | | | |
| 1 | Logical Unit Number | | | PList | GList | Defect List Format | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Allocation Length (MSByte) | | | | | | | |
| 7 | Allocation Length | | | | | | | |
| 8 | Allocation Length | | | | | | | |
| 9 | Allocation Length (LSByte) | | | | | | | |
| 10 | Reserved | | | | | | | |
| 11 | Reserved | | | | | Flag | Link | |

PList & GList

Grown List bit of 1 (and regardless of Primary List bit) indicates that the drive will return the contents of Primary Defect List and Secondary Defect List. Primary List bit of 1 and Grown List of 0 indicates that the drive will only return the contents of Primary Defect List.

Defect List Format

This field specifies the Format of Defect List which is to be returned. Only the Physical Sector Format(5) is supported. If the Block Format(0) is specified, the defect list will be returned in Physical Sector Format and a CHECK CONDITION status will be returned at the completion of the command with Sense Key/Additional Sense Code/Additional Sense Code Qualifier set to 01H/19H/01H (RECOVERED ERROR/Defect List Not Available).

Allocation Length

This field specifies the number of bytes that the initiator has allocated for the return of this data. Allocation Length of 0 indicates that no data will be returned. This condition is not considered as an error. The drive will terminate the data-in-phase when the Allocation Length has been transferred or when all the available defect data has been transferred to the initiator, whichever is less.

In this command, the READ DEFECT DATA header is extend to 8-byte. READ DEFECT DATA header is as follows.

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|-----------------------------|-------|-------|-------|-------|--------------------|-------|-------|
| 0 | Reserved | | | | | | | |
| 1 | Reserved | | | PList | GList | Defect List Format | | |
| 2 | Reserved | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Defect List Length (MSByte) | | | | | | | |
| 5 | Defect List Length | | | | | | | |
| 6 | Defect List Length | | | | | | | |
| 7 | Defect List Length (LSByte) | | | | | | | |

PList

Primary List bit of 1 indicates that the Primary List of defects is returned.

GList

Grown List bit of 1 indicates that the Grown List of defects is returned.

Defect List Format

This field will be set as the same value indicated in Defect List Format field (which has the fixed value of 5) of CDB. And this specifies the format of the Defect List Data returned by the drive.

Defect List Length

This field specifies the total length of the Defect Descriptor that follows in bytes.

The format of Physical Sector Format Defect Descriptor is shown in the following table:

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--|-------|-------|-------|-------|-------|-------|-------|
| 0 | Physical Track Number of the Defect (MSByte) | | | | | | | |
| 1 | Physical Track Number of the Defect | | | | | | | |
| 2 | Physical Track Number of the Defect (LSByte) | | | | | | | |
| 3 | Reserved | | | | | | | |
| 4 | Reserved | | | | | | | |
| 5 | Reserved | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Defective Physical Sector Number | | | | | | | |

READ LONG***DEH****FUNCTION**

Read data from the specified Logical Block Address with Error Correction Code data.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|-------|-------|----------|-------|-------|-------|--------|
| 0 | Operation Code (DEH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | Reserved | | | | | | Flag | Link |

Transfer Length

This field specifies the number of logical blocks to be transferred. Total number of data bytes to be sent from the initiator are multiple of the transfer length and sector size.

* 4096 media = 4760 bytes (4096 data + 664 pointers, CRC, pad and ECC)

* 2048 media = 2380 bytes (2048 data + 332 pointers, CRC, pad and ECC)

* 1024 media = 1200 bytes (1024 data + 176 pointers, CRC, pad and ECC)

* 512 media = 610 bytes (512 data + 98 pointers, CRC, pad and ECC)

Note:

If a blank block is detected during blank checking, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/93H/00H (BLANK CHECK/Blank Sector Detected).

* This command is a vendor unique command.

WRITE LONG***DFH****FUNCTION**

Writes data to the specified Logical Block Address without using the Error Correction Code.

CDB

| Byte | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|------|--------------------------------|---------|----------|----------|-------|-------|-------|--------|
| 0 | Operation Code (DFH) | | | | | | | |
| 1 | Logical Unit Number | | | Reserved | | | | RelAdr |
| 2 | Logical Block Address (MSByte) | | | | | | | |
| 3 | Logical Block Address | | | | | | | |
| 4 | Logical Block Address | | | | | | | |
| 5 | Logical Block Address (LSByte) | | | | | | | |
| 6 | Reserved | | | | | | | |
| 7 | Transfer Length (MSByte) | | | | | | | |
| 8 | Transfer Length (LSByte) | | | | | | | |
| 9 | Reserved | ErsCntl | Reserved | | | | Flag | Link |

Transfer Length

This field specifies the number of logical blocks to be transferred. Total number of data bytes to be sent from the initiator are multiple of the transfer length and sector size.

* 4096 media = 4760 bytes (4096 data + 664 pointers, CRC, pad and ECC)

* 2048 media = 2380 bytes (2048 data + 332 pointers, CRC, pad and ECC)

* 1024 media = 1200 bytes (1024 data + 176 pointers, CRC, pad and ECC)

* 512 media = 610 bytes (512 data + 98 pointers, CRC, pad and ECC)

ErsCntl**

Erase Control bit of 0 orders the automatic ERASE operation before writing the data. Erase Control bit of 1 suppress the automatic ERASE operation. This is an option for applications which require fast data writing.

* The command is a vendor unique command.

** This bit is a vendor unique bit.

Write-Once Medium

If a written block is detected during the operation of this command, the drive will return a CHECK CONDITION status. Then the Sense Key/Additional Sense Code/Additional Sense Code Qualifier will be set to 08H/92H/00H (BLANK CHECK/ Overwrite Attempted).

Note:

When this command is issued while 600 Mbyte/650 Mbyte media and 1.2 Gbyte/1.3 Gbyte are inserted, the drive will return the Sense Key/Additional Sense Code/Additional Sense Code Qualifier is set to 07H/27H/00H (DATA PROTECT/Write Protected).

Appendix A: Internal Error Code

X's are arbitrary characters. The last two characters of Internal Error Code (NN) indicates either ODC or DSP Error Code.

| Error Code | Name | Description |
|-------------------|---------------------|---|
| 012BXXXX | SC MSG INVALID | Invalid SCSI message received |
| 012CXXXX | SC IDMSG INVBIT | Invalid bit of Identify message set to one |
| 012DXXXX | SC MSG PERR | Parity error detected while receiving a SCSI message |
| 012EXXXX | SC MSG RJERR | SCSI message rejected |
| 012FXXXX | SC MSG ATERR | Attention signal asserted after Message Out Phase |
| 0130XXXX | SC PARITY ERR | SCSI I/F parity error detected |
| 0131XXXX | SC IDE RCVD | Initiator Detected Error Message is received |
| 0133XXXX | SC SYND ERR | Offset of synchronous data transfer is too large |
| 0134XXXX | SC SHORT PRD | Period of synchronous data transfer is too short |
| 0139XXXX | SC CLEAR QUE | Clear Queue message received |
| 013AXXXX | SC RESELECT | No response from Initiator for reselection |
| 013BXXXX | SC FATAL | Unusual SCSI controller condition |
| 013CXXXX | SC FATAL2 | Unusual SCSI controller condition |
| 0204XXXX | MCODE INVALID | Invalid micro code data received |
| 020AXXXX | CDB0 INVALID | Invalid Operation Code specified |
| 020BXXXX | LBA RANGE INVALID | Invalid LBA range specified |
| 020CXXXX | CDB FIELD INVALID | Invalid field in CDB specified |
| 020DXXXX | PARAM LIST INVALID | Invalid parameter list specified |
| 0210XXXX | PR LIST LEN ERROR | Invalid parameter list length |
| 0211XXXX | SAV PARAM NO SPPORT | Parameter saving function not supported |
| 0212XXXX | SAV PARAM NOTRDY | Parameter not currently saved |
| 0213XXXX | EJECT PREVENTED | Cartridge eject prevented |
| 0250XXXX | OVERWT ERR | Overwriting on already written sector of Write-Once media attempted |
| 0254XXXX | QUE CMD CLEARED | Queued command cleared by another initiator |
| 0255XXXX | QUE OVERLAPPED CMD | Command received for the same ITL (or ITLQ) nexus |

| Error Code | Name | Description |
|------------|---------------------|--|
| 026CXXXX | INVALID CCW COM | Invalid command for Write-Once media specified |
| 0321XXXX | LOADER FATAL | Loader task ended with unusual condition |
| 0322XXXX | INIT LOADER ERR | Sensor failure upon loader initialization |
| 0323XXXX | RECOVER LOADER ERR | Failed in recovery procedure of loader initialization |
| 0324XXXX | LOAD DISK ERR | Cartridge loading failure |
| 0327XXXX | UNLOAD DISK ERR | Cartridge unloading failure |
| 0416XXXX | START/STOP EXEC | Proceeding Start/Stop command |
| 0417XXXX | DRC INITIALIZE | Loader being initialized |
| 0418XXXX | DRC NO DISK | No cartridge in drive |
| 041AXXXX | DRC SPINNING UP | Media being spun-up |
| 041BXXXX | DRC LOADING | Media being loaded |
| 041CXXXX | DRC LOAD COMPLETE | Media load complete |
| 041DXXXX | DRC DRIVE NOT READY | Drive not ready |
| 041EXXXX | DRC SPINNING DOWN | Media being spun-down |
| 041FXXXX | DRC UNLOADING | Media being unloaded |
| 0420XXXX | DRC UNKNOWN | Drive unable to be Ready due to unknown reason |
| 0425XXXX | BECOME TO READY | Drive in process of becoming ready |
| 046FXXXX | DRC FORMATTING | Drive in process of formatting a medium |
| 0514XXXX | DEFL FORM INVALID | Defect List Format not supported |
| 0515XXXX | WRITE PROTECTED | Cartridge protected from writing data |
| 0528XXXX | INVALID ID HOLE | Invalid ID hole of the cartridge |
| 0529XXXX | NOT SUPPORT MEDIUM | Media not supported |
| 053EXXXX | PDL ERROR | Invalid PDL data |
| 053FXXXX | SDL ERROR | Invalid SDL data |
| 0540XXXX | DDS NOT FOUND | DDS sectors not found |
| 0541XXXX | PDL NOT FOUND | PDL sector not found |
| 0542XXXX | SDL NOT FOUND | SDL sector not found |
| 0543XXXX | CANNOT READ DMA | DMA sector cannot be read |
| 0544XXXX | DDS INVALID | Invalid DDS data |
| 0545XXXX | CANNOT READ SFP | SFP sector cannot be read |
| 0546XXXX | SFP INVALID | Invalid SFP data |
| 0547XXXX | EWR TEST ERR | Erase/BlankCheck/Write/Read/Compare test failure after media load up and spin-up |
| 0548XXXX | NO DEFECT SPARE | Exhausted spare area for defective sector |
| 0549XXXX | DEFECT UPDATE ERR | DMA sectors update failure |

| Error Code | Name | Description |
|------------|---------------|--|
| 054AXXXX | PEP INVALID | DMA sectors update failure |
| 054BXXXX | RW REALLOC | Defective sector recovered with automatic write reallocation procedure |
| 054CXXXX | REALLOC FAIL | Automatic write reallocation procedure failure |
| 0551XXXX | BLANK ERR | Blank sector detected |
| 0575XXXX | SCAN_Fail | MSCAN failure |
| 0576XXXX | SCAN_OK | MSCAN good |
| 0577XXXX | ID WREALLOC | Automatic Write Reallocation performed due to ID Error |
| 0578XXXX | ECC WREALLOC | Automatic Write Reallocation performed due to Uncorrectable ECC Error |
| 0579XXXX | SYNC WREALLOC | Automatic Write Reallocation performed due to SYNC Error |
| 057AXXXX | FLT WREALLOC | Automatic Write Reallocation performed due to Servo Fault Error |
| 057EXXXX | ID RECOVER | ID Error recovered by retry |
| 057FXXXX | ECC RECOVER | Uncorrectable ECC Error recovered by retry |
| 0580XXXX | SYNC RECOVER | SYNC Error recovered by retry |
| 0581XXXX | FLT RECOVER | Servo Fault Error recovered by retry |
| 0582XXXX | RDNEXT IDERR | ID Error even with a retry after changing the ID Error criteria |
| 0583XXXX | AR DMAUPT ERR | DMA Update failed after Automatic Reallocation |
| 058AXXXX | UPDDMA COND | DMA Update failed |
| 0601XXNN | ODC ERROR | Error code NN received (refer to Appendix B: ODC Error Code Table) |
| 0664XXXX | DCM TMOUT | ODC interrupt time out |
| 0670XXXX | ODCABT FAIL | Cannot abort ODC command |
| 0692XXNN | ODC2 ERROR | Error code NN received (refer to Appendix B: ODC Error Code Table) |
| 0702XXNN | DSP ERROR | Error code NN received from DSP (refer to Appendix C: DSP Error Code Table) |
| 075CXXXX | DSPDLOAD ERR | Down-load DSP code error |
| 075EXXXX | DSPRSS ERR | DSP request command communication error |

| Error Code | Name | Description |
|------------|----------------|---|
| 0760XXXX | DSPCMU ERR | DSP command communication error |
| 0762XXXX | DSPECHO ERR | ECHO command of DSP failure |
| 0767XXXX | IKISUGI | Target sector cannot be found (time out after seek complete) |
| 0774XXXX | WRITE FAULT | Servo failure during write operation |
| 0789XXXX | LPCCAL FAIL | LPC Calibration failed |
| 078BXXXX | IDOST FAIL | ID Offset Calibration failed |
| 078CXXXX | MOOST FAIL | MO Offset Calibration failed |
| 078DXXXX | VFOO FAIL | VFO Offset Calibration failed |
| 078EXXXX | IDVGA FAIL | ID VGA Calibration failed |
| 078FXXXX | MOVGA FAIL | MO VGA Calibration failed |
| 0791XXXX | FCSBIAS FAIL | Focus Bias Calibration failed |
| 0784XXXX | RPCAL. FAIL | MSR Read Power Calibration failed |
| 093DXXXX | RW ABORT | Read/Write task aborted |
| 0957XXXX | PON DIAG TOUT | Power-On diagnostic time out |
| 0959XXXX | ROM CHECK SUM | ROM Check Sum error |
| 095AXXXX | DSPFUNC ILG | Illegal request for DSP Interface task |
| 095FXXXX | DSPPRM LEN | Command Parameter Length contradiction to DSP |
| 0961XXXX | DSPRLW ERR | Release wait of DSP I/F task |
| 0965XXXX | DCM ABORT | ODC command aborted |
| 0968XXXX | RWFUNC ILG | Illegal request to Read/Write task |
| 096EXXXX | PARAM INVALID | Invalid Parameter Block data |
| 0A4FXXXX | LINE 12V ERR | 12V line not supported |
| 0A71XXXX | RAM DIAG ERR | RAM Test Error |
| 0A72XXXX | ODC DIAG ERR | ODC Test Error |
| 0A98XXXX | ODCDLOAD ERR | Down-load ODC code error |
| 0E03XXXX | FLASH UPD ERR | Flash ROM update failure |
| 0E05XXXX | SAVE PARAM ERR | Parameter save failure |
| 0E56XXXX | PARAM BLK ERR | Parameter block not saved or invalid value |

Appendix B: ODC Error Code

These error codes may be indicated as part of Internal Error Code (Last two characters, NN).

| Error Code | Name | Description |
|-------------------|-------------|--|
| 01 | DCM_STOP | ODC command aborted |
| 08 | SEARCH_NG | Invalid search condition |
| 11 | E_LMT | Number of error bytes exceeding the limit |
| 12 | S_LMT | Cannot detect SYNC |
| 13 | ES_LMT | Both error 11 and 12 |
| 14 | R_LMT | Number of RESYNC misdetection exceeding the limit |
| 15 | ER_LMT | Both error 11 and 14 |
| 16 | RS_LMT | Both error 12 and 14 |
| 17 | ESR_LMT | Both error 13 and 14 |
| 18 | NI_ERR | Cannot Read ID of Next Sector of last Target Sector |
| 19 | NIE_ERR | Both error 11 and 18 |
| 1A | NIS_ERR | Both error 12 and 18 |
| 1B | NIES_ERR | Both error 13 and 18 |
| 1C | NIR_ERR | Both error 14 and 18 |
| 1D | NIRS_ERR | Both error 15 and 18 |
| 1F | NIESR_ERR | Both error 17 and 18 |
| 20 | SM_ERR | SM (Sector Mark) error |
| 21 | IDCRC_ERR | ID CRC error |
| 22 | SYNC_ERR | Cannot detect SYNC and the first RESYNC |
| 23 | RDSHORT_ERR | DTRG becomes non-active before all the data of sector is transferred |
| 24 | UNCORE_ERR | Uncorrectable error |
| 25 | CRC_ERR | CRC error (Uncorrectable) |
| 26 | P1_ERR | SELF ID Mismatch |
| 27 | P2_ERR | SELF ID Mismatch |
| 29 | RDOVR_ER | Read Data Over Run error detected |
| 2A | RDBLK_ERR | Read Blank error |
| 31 | WTUDR_ERR | Write Data Over Run error detected |
| 32 | DSV_ERR | DSV (Digital Sum Value) error |
| 34 | BLK_ERR | Written Sector detected |
| 42 | B_BCHK_ERR | Buffer Memory WRITE/READ/COMPARE error |

| Error Code | Name | Description |
|------------|---------------|---|
| 44 | SGOVR_ERR | Cannot proceed error correction because of the exhausting syndrome buffer |
| 45 | ECCTOUT_ERR | Cannot correct error bytes within time (= time to pass one sector) |
| 46 | WTSHORT_ERR | Write data transfer to encoder too short |
| 47 | WTLONG_ERR | Write data transfer to encoder too long |
| 48 | ECCFATAL_ERR | Unexpected sequence of error correction |
| 4E | ODCINT_ERR | Unexpected interrupt detected in the ODC chip |
| 4F | ODCTOUT_ERR | Unexpected firmware sequence in ODC chip |
| 50 | EQC_ERR | Asynchronous interrupt of DSP detected |
| 51 | OFFTRK_ERR | Unexpected ID value is detected |
| 52 | ID_CRPT_ERR | Both unexpected and expected ID value are detected on one sector. |
| 53 | EQC2_ERR | Asynchronous interrupt of DSP detected |
| 54 | TARGETOVR_ERR | Target sector already passed when current position is detected |
| 57 | ILGSEC_ERR | Detected ID sector number is greater than the maximum sector number |
| 59 | NKT ID51_ERR | error 51 at Next ID |
| 5A | NKT ID52_ERR | erro 52 at Next ID |
| 70 | NOTPL_ERR | Parameter List not prepared |
| 71 | ILGPLSEC_ERR | Sector number of Parameter List is greater than the maximum sector number |
| 72 | ILGPLCNT_ERR | Sector count of Parameter List set to 0 in W/R/S |
| 73 | ILGPLCND_ERR | Undefined condition set in DTS and DLS command |
| 7D | ILGSETUP_ERR | Set-up command issued while executing Identify operation |
| 7E | DBLCOM_ERR | Command issued while executing another command |
| 7F | NOTCOM_ERR | Undefined command issued |

Appendix C: DSP Error Code

These error codes may be indicated as part of Internal Error Code (Last two characters, NN).

Error codes with asterisk(*) are only for internal use and not intended to be reported to the host as a command error.

| Error Code | Name | Description |
|------------|---------------|---|
| 01 | MEASFLR | Offset measurement failure (Servo signal offset was too large) |
| 09 | IDACCALFLR | IDAC calibration failure |
| 0B | NOIDINTVGACAL | Read channel VGA calibration failure (1X / 2X / 4X / 8X/ 14X) |
| 0C | NOCALIBVGACAL | Read channel VGA calibration failure (1X / 2X / 4X / 8X/ 14X) |
| 0D | PCALRCFLR | Read channel OST calibration failure(4X / 8X/ 14X) |
| 0E | NORCHDATA | Read channel MOVGA calibration failure (1X / 2X/ 14X) |
| 0F | FCSFLRVGACAL | FCSFLR VGA calibration failure(4X / 8X/ 14X) |
| 10 | IDVGACALFLR | Read channel IDVGA calibration cannot be arranged.(4X / 8X/ 14X) |
| 11 | MISCHUCK2 | Medium mischucking (FCSFLR error) |
| 21 | SPOFFABT | Spindle off aborted |
| 34* | CALIBREQ | LD power calibration request |
| 41 | NORDY | Drive not ready |
| 43 | IMITATEATT | Imitate ATT happen for ESD |
| 44 | IDSRCHFCSFLR | FCS failed at id search |
| 45 | ATT | Attention occurred |
| 52 | ILLGLZONE1 | Illegal zone selected (ALTERNATE ZONE) |
| 54 | ILLGLZONE3 | Illegal target zone selected for SEEK command (SEEK start) |
| 55 | ILLGLZONE4 | Illegal target zone selected during OTJ (SEEK OTJ) |
| 56 | ILLGLZONE5 | Illegal target zone (SEEK landing) |
| 57 | ILLGLZONE6 | Illegal next zone (SEEK landing) |
| 58 | ILLGLZONE7 | Illegal zone (ID search) |
| 59 | ILLGLZONE8 | Illegal zone (ID search) |

| Error Code | Name | Description |
|------------|--------------|--|
| 5A | ILLGLZONE9 | Illegal zone (Focus search) |
| 5B | KINERR | Kick inner area failed |
| 5C | AGCTIMEOUT | Servo AGC time out |
| 5F | ABTRD PEP | PEP Read aborted |
| 61 | FCSONFLR | Focus on failed |
| 62 | FCSONABT | Focus on aborted |
| 64 | TRKDRVFLR | Tracking Drive Saturation |
| 65 | NOID1 | No ID (No SM or CRC NG) (DON start) |
| 66 | NOID2 | No ID (No SM or CRC NG) (SEEK start) |
| 67 | NOID3 | No ID (No SM or CRC NG) (SEEK landing) |
| 68 | SLIPPY | Seek slip too much |
| 69 | SEEKTIMEOUT | Seek time out |
| 6A | TOOLONGTOGO | Seek target is long time to go in OTJ. |
| 6B | MTJTOOLONG | Too much time for Multi-Track Jump |
| 6C | FCSFLR | Focus failure (Defocus or off focus servo) |
| 6D | TRKFLR | Tracking failure (Detrack or off-track) |
| 6E | LOPI | Low pull-in signal (Off focus servo) |
| 6F | FCSDRVFLR | Focus drive saturation (Off focus servo) |
| 71 | NOPEP | Cannot detect PEP signal |
| 72 | PEPPOSFCSFLR | Focus failed (PEP positioning) |
| 74 | PEPRDFCSFLR1 | Focus failed (searching PEP GAP) |
| 75 | PEPRDFCSFLR2 | Focus failed (searching PEP PA) |
| 76 | PEPRDFCSFLR3 | Focus failed (searching PEP data) |
| 77 | PEPRDFCSFLR4 | Focus failed (before searching PEP data) |
| 78 | NOPEPGAP | No PEP GAP found |
| 79 | ILLGLPEPFMT0 | Illegal PEP format found (PA) |
| 7A | ILLGLPEPFMT1 | Illegal PEP format found (data) |
| 7B | PEPDECODEERR | PEP decoding byte count error |
| 7C | PEPFUNNYSYNC | Funny PEP Sync found |
| 7D | PEPNOSYNC | No PEP SYNC found |
| 7E | PEPCRCNG | PEP CRC NG |
| 7F | PEPCMPERR | 1 st and 2 nd PEP data compare error |

| Error Code | Name | Description |
|------------|------------|--|
| C1 | PSDNG | Bogo-PSD (Recalibrate) |
| C2 | NOBMFLIP | Bias magnet failure |
| C9 | NOLDPWR | No LD power |
| CA* | ASSERTWFLT | Assert write fault signal for controller debug |
| CF | TMPALRM | Temperature alarm |
| D1 | ILLGLADR | Illegal address selected |
| D3 | INVLD CMD | Invalid Command |
| D4 | ESDIFLR | Communication Failure |
| E1 | SPONFLR | Spindle lock time out |
| E2 | SPOFFFLR | Spindle off failed |
| E3 | MISCHUCK1 | Medium mischucking (PONFLR) |
| E4 | TDFCTFLR | Tracking Failure for certifier |
| E5 | SPONFLR2 | Spindle Lock time-out |
| E6 | FDFCTFLR | Focus Failure for certifier |
| F3 | REASETFLR | E/A R/C Serial Write Block NG |
| F4 | LEASETFLR | E/A LPC Serial Write Block NG |
| F5 | REAREADFLR | E/A R/C Serial Read Block NG |

SMO-F561 series

Magneto-Optical Disk Drive

SCSI Specifications