


PLASMON CABLE RECOMMENDATIONS

Library Model	Interface	Library Internal Cable Length		Allowable External Cable Length (Max)		Library SCSI Connector
M20J	Single Ended/ Differential Option Available	4 FT	1.2 M	14FT/82FT	4.8M/25 M	CENTRONICS D TYPE
M32J	Single Ended/ Differential Option Available	4 FT	1.2 M	14FT/82FT	4.8M/25 M	CENTRONICS D TYPE
M52J	Single Ended/ Differential Option Available	6.5 FT	2 M	115FT/82FT	4M/25M	CENTRONICS D TYPE
M104J	Single Ended/ Differential Option Available	12 FT	3.6 M	6FT/82FT	24M/25M	CENTRONICS D TYPE
M156J	Single Ended/ Differential Option Available	12 FT	3.6 M	6FT/82FT	24M/25M	CENTRONICS D TYPE
M258J	Single Ended/ Differential Option Available	12 FT	3.6 M	6FT/82FT	24M/25M	CENTRONICS D TYPE
M500 1 Bus	Single Ended/ Differential Option Available	12 FT	3.6 M	6FT/82FT	24M/25M	CENTRONICS D TYPE
M500 2 Bus	Single Ended/ Differential Option Available	8 FT	2.4 M	10FT/82FT	36M/25M	CENTRONICS D TYPE
M500 4 Bus	Single Ended/ Differential Option Available	6 FT	1.8 M	12FT/82FT	42M/25M	CENTRONICS D TYPE
D120 1 Bus	Single Ended	14 FT	4 M	4 FT	1.7 M	CENTRONICS D TYPE
D120 2 Bus	Single Ended	7 Ft	2 M	8 FT	2.4 M	CENTRONICS D TYPE
D240 1 Bus	Single Ended	16FT425IN	5.04 M	3 FT	1 M	CENTRONICS D TYPE
D240 2 Bus	Single Ended	8.3 FT	2.7 M	6 FT	1.8 M	CENTRONICS D TYPE
D480 1 Bus	Single Ended	16FT425IN	5.04 M	3 FT	1 M	CENTRONICS D TYPE
D480 2 Bus	Single Ended	8.3 FT	2.4 M	6 FT	1.8 M	CENTRONICS D TYPE
D120 with Re-drive	LVD	2 FT	.6M	37 FT	11 M	High Density 68 Pin
D240 Re-drive	LVD	2 FT	.6M	37 FT	11 M	High Density 68 Pin
D480 Re-drive	LVD	2 FT	.6M	37 FT	11 M	High Density 68 Pin
D Enterprise Bus 1	LVD	10 FT	3 M	29 FT	9 M	High Density 68 Pin
D Enterprise Bus 2	LVD	3 FT	1 M	36 FT	11 M	High Density 68 Pin
D Enterprise Bus 3	LVD	3 FT	1 M	36 FT	11 M	High Density 68 Pin
D Enterprise All Busses	HVD	N/A	N/A	82 FT	25 M	High Density 68 Pin





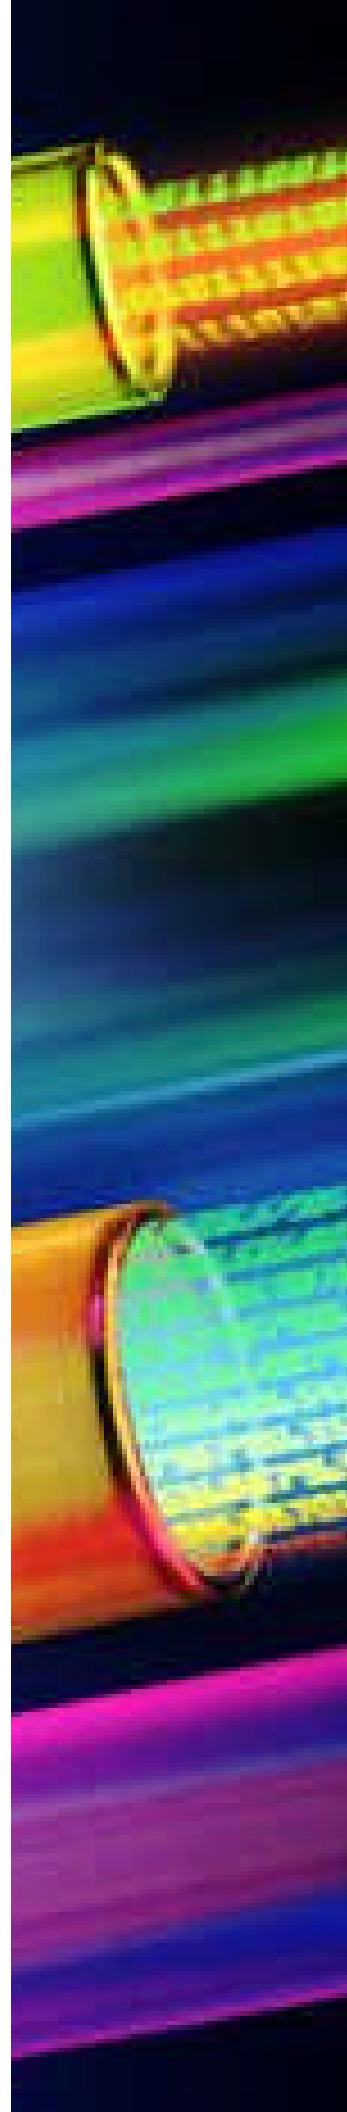

Library Model	Interface	Library Internal Cable Length		Allowable External Cable Length (Max)		Library SCSI Connector
V 10	LVD	10 inches	25'M	38FT-2FT/DRIVE	115M-6M/DRIVE	High Density 68 Pin
V 21	LVD	10 inches	25 M	38FT-2FT/DRIVE	115M-6M/DRIVE	High Density 68 Pin
V40	LVD/SE	2 FT/library + 3FT/Drive	.6M + .9M/Drive	37FT-2FT/DRIVE 7FT-2FT/Drive Recommend 2 drives/bus	11M-.9M/DRIVE Recommend 2 drives/bus 2M-.9M/Drive Recommend 2 drives/bus	High Density 68 Pin
V60	LVD/SE	2 FT/library + 3FT/Drive	.9M + .9M/Drive	37FT-2FT/DRIVE 7FT-2FT/Drive Recommend 2 drives/bus	11M-.9M/DRIVE Recommend 2 drives/bus 2M-.9M/Drive Recommend 2 drives/bus	High Density 68 Pin
V 68	LVD/SE	3 FT/library + 3FT/Drive	.9M + .9M/Drive	37FT-2FT/DRIVE Recommend 2 drives/bus 7FT-2FT/Drive Recommend 2 drives/bus	11M-.9M/DRIVE Recommend 2 drives/bus 2M-.9M/Drive Recommend 2 drives/bus	High Density 68 Pin
V 102	LVD/SE	3 FT/library + 3FT/Drive	.6M + .5M/Drive	37FT-3FT/DRIVE Recommend 2 drives/bus 7FT-2FT/Drive Recommend 2 drives/bus	11M-.9M/DRIVE Recommend 2 drives/bus 2M-.9M/Drive Recommend 2 drives/bus	High Density 68 Pin
G24/32 G72/80	LVD LVD HVD	10 feet SCSI Redrive Option SCSI Redrive Option	3 Meters N/A N/A	29 ft 39 ft 82 ft	8.8 M 12 M 25 M	High Density 68 Pin
G64	LVD/SE HVD Option Available	N/A SCSI Redrive	N/A	39ft/9ft 82 ft	12M/6M 25M	High Density 68 Pin
G104	LVD/SE HVD Option Available	N/A SCSI Redrive	N/A	39ft/9ft 82 ft	12M/6M 25M	High Density 68 Pin
G164	LVD/SE HVD Option Available	N/A SCSI Redrive	N/A	39ft/9ft 82 ft	12M/6M 25M	High Density 68 Pin
G238	LVD/SE HVD Option Available	N/A SCSI Redrive	N/A	39ft/9ft 82 ft	12M/6M 25M	High Density 68 Pin
G638	LVD/SE HVD Option Available	N/A SCSI Redrive	N/A	39ft/9ft 82 ft	12M/6M 25M	High Density 68 Pin

SCSI Cable Length Conversions

Interface Type	Distance (US)	Distance (Metric)
Single Ended(SE)	19.6 feet	6 meters
Low Voltage Differential (LVD)	39 feet	12 meters
High Voltage Differential (HVD)	82 feet	25 meters

SCSI Cable Symbols

			
Single-ended SCSI	LVD SCSI	HVD SCSI	LVD/MSE SCSI



Plasmon, Inc.
U.S. Sales & Marketing Headquarters
400 Inverness Drive South Ste 310
Englewood, CO 80112
Tel: 800-451-6845
Fax: 720-873-2501
sales@plasmon.com
www.plasmon.com

Plasmon Data Ltd.
European Sales & Marketing Headquarters
Whiting Way, Melbourn
Hertfordshire, SG8 6EN
Tel: +44 (0) 1763 262963
Fax: +44 (0) 1763 264444
sales@plasmon.co.uk
www.plasmon.co.uk

Plasmon, Inc.
Manufacturing Headquarters
4425 ArrowsWest Drive
Colorado Springs, CO 80907
Tel: 719-593-7900
Fax: 719-593-4597
sales@plasmon.com
www.plasmon.com